



Hydrostatic indicator TankControl 10



1



- For fuel oil EL, L, diesel fuel, biodiesel and water
- Graphical indication of consumption and remaining range
- With visual/audible alarms, Acknowledge button and 2 relays
- Remote measurements up to 15 m

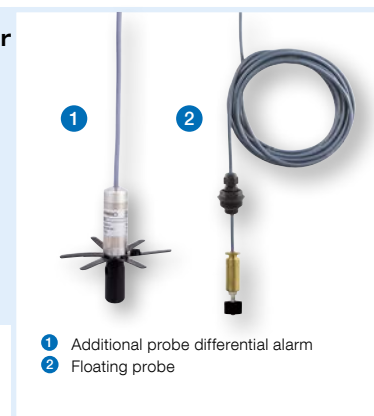

- 1 Additional probe differential alarm
- 2 Floating probe

Application Continuous level measurement with graphical display for indication of consumption (history), calculation of remaining range (forecast) and signalling of minimum or maximum levels as well as for level control. For tanks from 1,000 to 4,000 mm liquid level. Suitable for fuel oil EL, L, diesel fuel, FAME 100 % as biodiesel (EN 14214), water (no drinking water!) as well as similar liquids. In conjunction with an additional submersible probe for differential alarm also suitable for detecting level differences in communicating tanks (e.g. battery tanks) which may cause overfilling. It is also possible to connect a floating probe for backflow alarms (drain system, e.g. for rain water harvesting systems) or for additional minimum or maximum alarms. Specially designed for building technology. Suitable for use in flood hazard areas.

Description The hydrostatic level indicator consists of a control unit with numerical and graphical display and a submersible probe with integrated pressure measuring cell. Optionally with additional submersible probe for differential alarm or with floating probe. The system displays either litres, m³, % or liquid level (mm). When the level falls below or exceeds an adjustable minimum or maximum value, the control unit triggers visual and audible (can be acknowledged) alarms. The value for submersible probe 1 is displayed in mm. If an adjustable level difference between submersible probe 1 and submersible probe 2 is exceeded, an alarm is triggered. Two additional relay contacts are available for external alarm devices, for level control or for connection to telecommunication or building control systems. High measuring accuracy due to electronic sensing. Standard tank shapes are stored. Watertight up to 10 m water column.

Technical specifications

Functions

Selection of units, daily saving of level data, consumption monitoring, graphical evaluation of consumption values (up to 5 years), calculation of remaining range, alarm functions (min./max.), sensor error and short circuit alarms.

Measuring range

0/400 mbar

Measuring accuracy

±1.5 % FS

Operating temperature range

Medium: -5/+70 °C

Ambient: 0/45 °C

Storage: -5/+70 °C

Display

High-resolution, backlit graphical display (30 x 50 mm). Indication of either litres (6 digits), m³, % or liquid level in mm. Symbols for alarm functions.

Submersible probe

Housing: Stainless steel 304 (1.4301)
Cable: PVC, 6 m with breather tube
Diaphragm: Stainless steel 316 L (1.4435)
Seals: FKM (Viton)
Spacer: POM, PE
Degree of protection: IP 68 (EN 60529)

Supply voltage

AC 230 V
Lithium battery for data backup (calendar function)

Switching outputs

Relay contacts: 2 voltage-free changeover contacts
Contact rating: AC 230 V, 2 A

Hydrostatic level indicator TankControl 10

Technical specifications

Visual alarm

Red LED

Audible alarm

Integrated piezo buzzer, can be acknowledged

Housing

Wall mounting housing made of impact-resistant plastic (ABS)

W x H x D 100 x 188 x 65 mm

Degree of protection: IP 54 (EN 60529)

Scope of delivery


- Control unit with graphical display and 15 m connection cable to the probe (cannot be extended)
- Submersible probe with 6 m submersible cable
- Moisture-proof junction box (IP 54)
- Screw connector kit G1 x G1½ x G2
- Mounting kit for withdrawal flange at plastic battery tanks

Options


- Submersible probe for differential alarm
- Floating probe (spare probe Minimelder)

1


Application examples TankControl 10

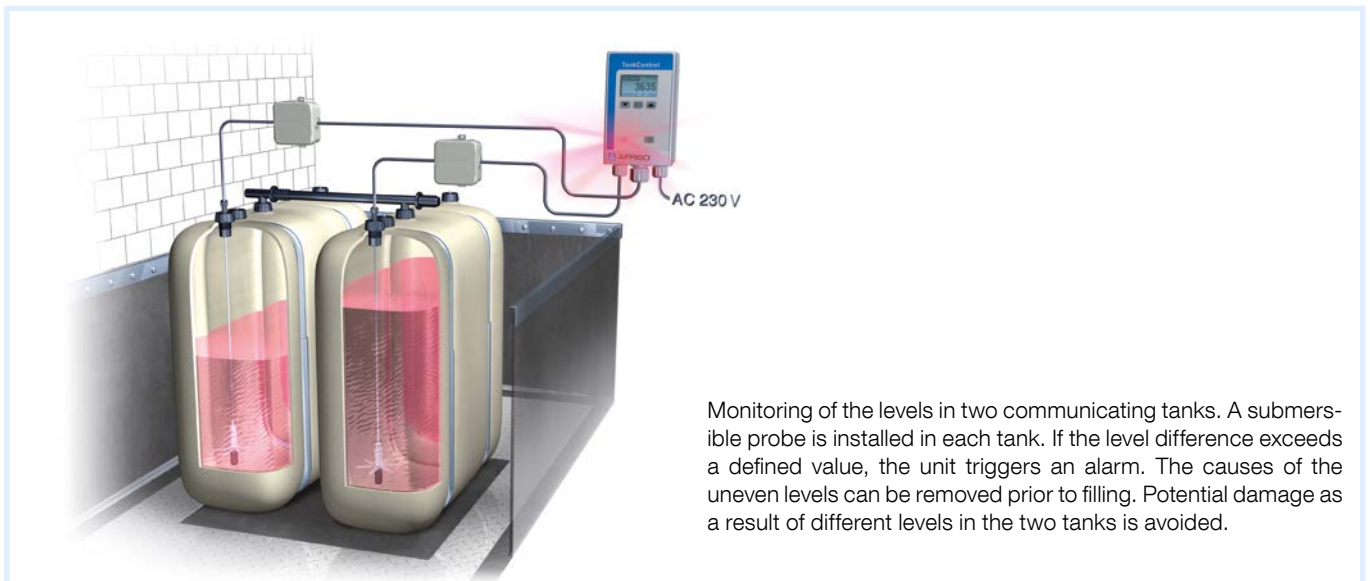

Monitoring of the levels in two communicating tanks. A submersible probe is installed in each tank. If the level difference exceeds a defined value, the unit triggers an alarm. The causes of the uneven levels can be removed prior to filling. Potential damage as a result of different levels in the two tanks is avoided.

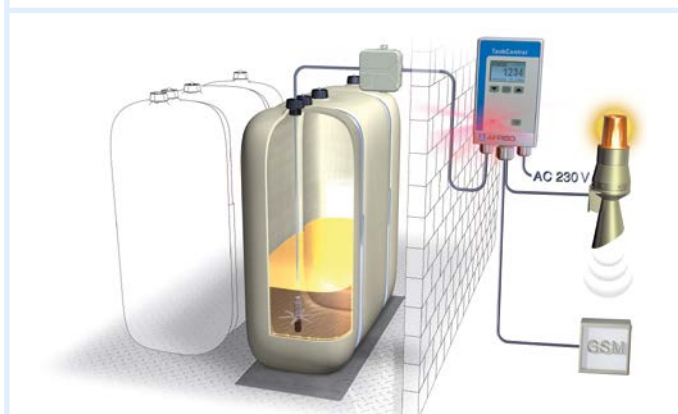

Monitoring of the level in a fuel oil tank with early signalling of minimum level. With combined alarm light and horn as additional alarm equipment outside of the building and transmission of alarm messages, level data and remaining range to a central building control system.

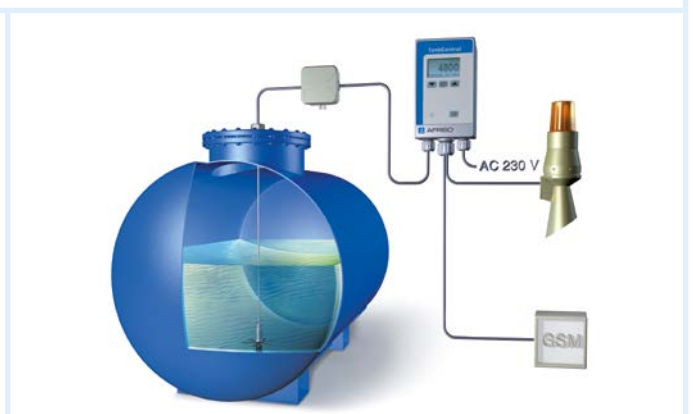

Monitoring of the level in an outdoor rain water tank. A combined alarm light and horn is connected in the vicinity of the tank; TankControl 10 is installed inside the building. It is also possible to connect a float switch to monitor for backflow from the drain. The system can be extended by a GSM-based event reporting system.

PG: 4	DG	Part no.	Price €
TankControl 10	H	52151	
Spare submersible probe (0/400 mbar)	H	52153	
Additional probe differential alarm	H	52152	
Floating probe (spare probe Minimelder)	G	16703	

Les services d'EURO-INDEX

EURO-INDEX fournit des services pour tous les instruments de sa gamme de fournitures et offre des services, de la connaissance et du personnel hautement qualifié pour l'entretien (préventif), la réparation et le calibrage de vos instruments de mesure.

Centre de Service Agréé.....

EURO-INDEX est un Centre de Service Agréé pour toutes les marques représentées.

Autrement dit, vos instruments sont traités par du personnel formé et compétent, qui dispose des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument ainsi que la certification (ATEX, EN50379, etc.) restent valables.

Laboratoire de maintenance et de calibrage

EURO-INDEX dispose d'un laboratoire de maintenance et de calibrage particulièrement moderne, titulaire d'une accréditation conforme à la norme NEN-EN-ISO/IEC 17025. Cette accréditation est valable pour différentes grandeurs, telles que spécifiées dans le champ d'application associé au numéro d'accréditation K105.



MQS®

MQS est une formule d'entretien exclusive comportant un entretien et un calibrage périodiques de vos instruments de mesure. La prise en charge de multiples aspects vise à vous libérer de tout souci lors de l'utilisation de vos instruments de mesure. Les coûts sont modiques et prévisibles.

Accès numérique à vos certificats de calibrage avec Mon MQS

Mon MQS est un portail Web qui vous donne accès partout et à tout moment à vos certificats de calibrage et aux documents apparentés.

Location d'instruments de mesure

- Vaste assortiment
- Conseils avisés
- Les instruments sont livrés avec leurs accessoires et leurs certificats de calibrage traçables

EURO-INDEX Academy

- Formations sur les produits (individuelles et collectives)
- Séminaires
- Vidéos de démonstration et d'instruction

Visionnez la vidéo sur notre chaîne YouTube et découvrez tout ce qu'il vous faut savoir sur MQS



Guichet des services



Calibrage de l'analyse de gaz de combustion



Séminaires et ateliers



Calibrage de la thermographie

Sous réserve de modifications EURO-INDEX® FR 18001

Le nom et la marque Bluetooth® sont la propriété de Bluetooth SIG Inc. L'utilisation de ce nom par EURO-INDEX s'effectue sous licence.



BELGIQUE
Leuvensesteenweg 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
info@euro-index.be
www.euro-index.be

PAYS-BAS
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

