



Hydrostatic indicator TankControl 10



1



- For fuel oil EL, L, diesel fuel, biodiesel and water
- Graphical indication of consumption and remaining range
- With visual/audible alarms, Acknowledge button and 2 relays
- Remote measurements up to 15 m

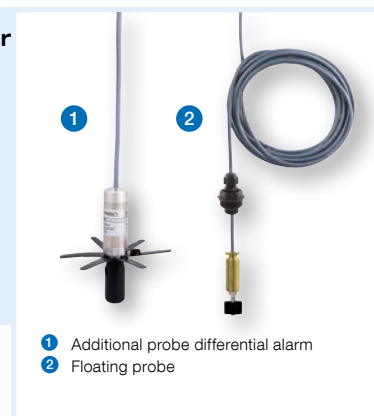

- 1 Additional probe differential alarm
- 2 Floating probe

Application Continuous level measurement with graphical display for indication of consumption (history), calculation of remaining range (forecast) and signalling of minimum or maximum levels as well as for level control. For tanks from 1,000 to 4,000 mm liquid level. Suitable for fuel oil EL, L, diesel fuel, FAME 100 % as biodiesel (EN 14214), water (no drinking water!) as well as similar liquids. In conjunction with an additional submersible probe for differential alarm also suitable for detecting level differences in communicating tanks (e.g. battery tanks) which may cause overfilling. It is also possible to connect a floating probe for backflow alarms (drain system, e.g. for rain water harvesting systems) or for additional minimum or maximum alarms. Specially designed for building technology. Suitable for use in flood hazard areas.

Description The hydrostatic level indicator consists of a control unit with numerical and graphical display and a submersible probe with integrated pressure measuring cell. Optionally with additional submersible probe for differential alarm or with floating probe. The system displays either litres, m³, % or liquid level (mm). When the level falls below or exceeds an adjustable minimum or maximum value, the control unit triggers visual and audible (can be acknowledged) alarms. The value for submersible probe 1 is displayed in mm. If an adjustable level difference between submersible probe 1 and submersible probe 2 is exceeded, an alarm is triggered. Two additional relay contacts are available for external alarm devices, for level control or for connection to telecommunication or building control systems. High measuring accuracy due to electronic sensing. Standard tank shapes are stored. Watertight up to 10 m water column.

Technical specifications

Functions

Selection of units, daily saving of level data, consumption monitoring, graphical evaluation of consumption values (up to 5 years), calculation of remaining range, alarm functions (min./max.), sensor error and short circuit alarms.

Measuring range

0/400 mbar

Measuring accuracy

±1.5 % FS

Operating temperature range

Medium: -5/+70 °C

Ambient: 0/45 °C

Storage: -5/+70 °C

Display

High-resolution, backlit graphical display (30 x 50 mm). Indication of either litres (6 digits), m³, % or liquid level in mm. Symbols for alarm functions.

Submersible probe

Housing: Stainless steel 304 (1.4301)
Cable: PVC, 6 m with breather tube
Diaphragm: Stainless steel 316 L (1.4435)
Seals: FKM (Viton)
Spacer: POM, PE
Degree of protection: IP 68 (EN 60529)

Supply voltage

AC 230 V
Lithium battery for data backup (calendar function)

Switching outputs

Relay contacts: 2 voltage-free changeover contacts
Contact rating: AC 230 V, 2 A

Hydrostatic level indicator TankControl 10

Technical specifications

Visual alarm

Red LED

Audible alarm

Integrated piezo buzzer, can be acknowledged

Housing

Wall mounting housing made of impact-resistant plastic (ABS)

W x H x D 100 x 188 x 65 mm

Degree of protection: IP 54 (EN 60529)

Scope of delivery


- Control unit with graphical display and 15 m connection cable to the probe (cannot be extended)
- Submersible probe with 6 m submersible cable
- Moisture-proof junction box (IP 54)
- Screw connector kit G1 x G1½ x G2
- Mounting kit for withdrawal flange at plastic battery tanks

Options


- Submersible probe for differential alarm
- Floating probe (spare probe Minimelder)

1


Application examples TankControl 10

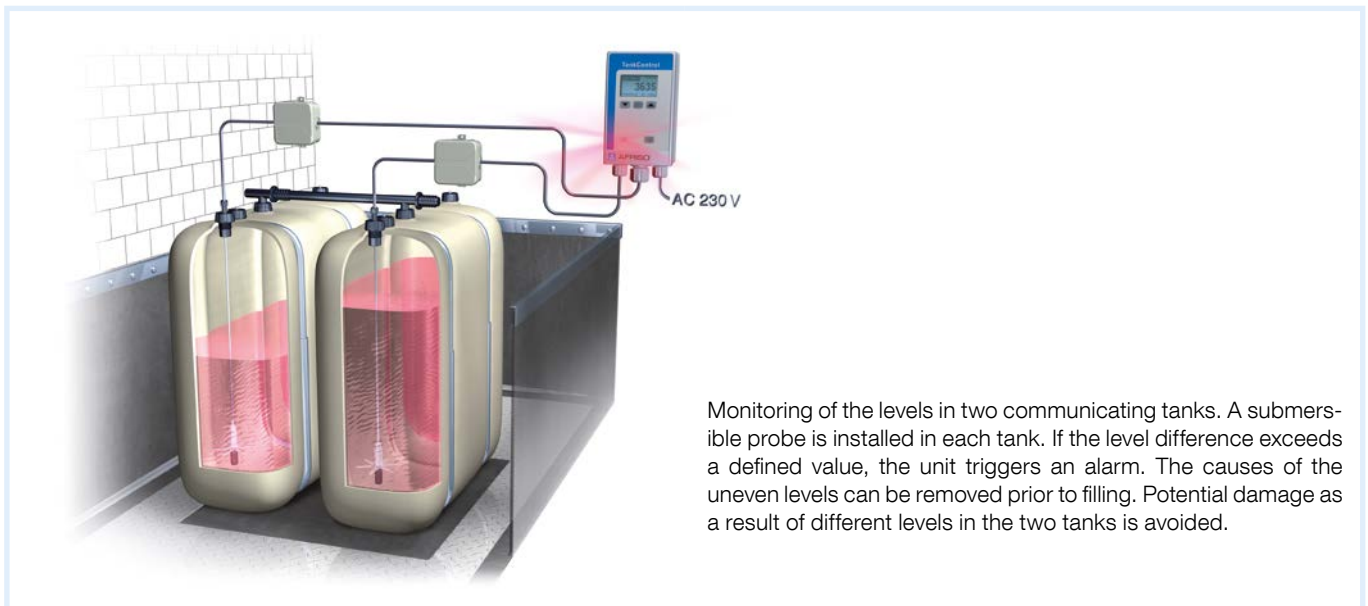

Monitoring of the levels in two communicating tanks. A submersible probe is installed in each tank. If the level difference exceeds a defined value, the unit triggers an alarm. The causes of the uneven levels can be removed prior to filling. Potential damage as a result of different levels in the two tanks is avoided.

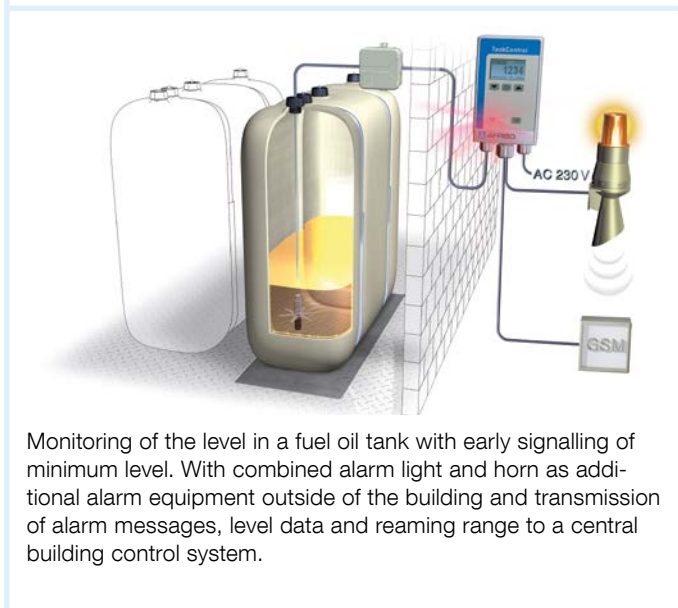

Monitoring of the level in a fuel oil tank with early signalling of minimum level. With combined alarm light and horn as additional alarm equipment outside of the building and transmission of alarm messages, level data and remaining range to a central building control system.

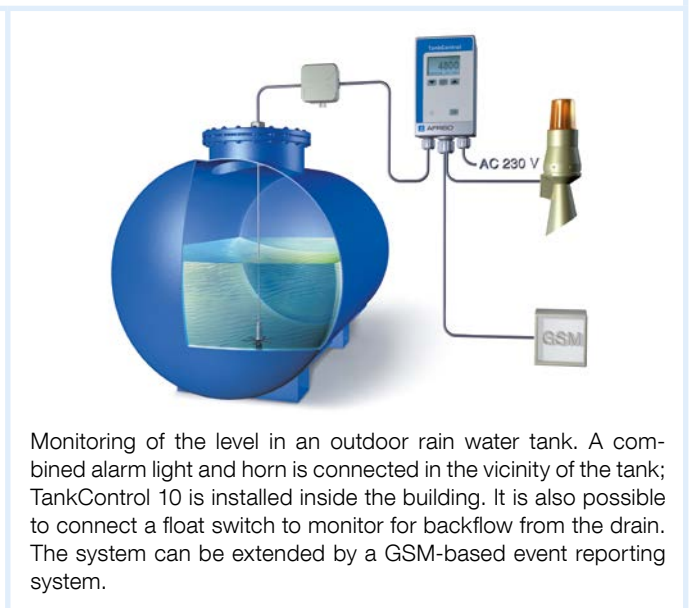

Monitoring of the level in an outdoor rain water tank. A combined alarm light and horn is connected in the vicinity of the tank; TankControl 10 is installed inside the building. It is also possible to connect a float switch to monitor for backflow from the drain. The system can be extended by a GSM-based event reporting system.

PG: 4	DG	Part no.	Price €
TankControl 10	H	52151	
Spare submersible probe (0/400 mbar)	H	52153	
Additional probe differential alarm	H	52152	
Floating probe (spare probe Minimelder)	G	16703	

Service van EURO-INDEX

EURO-INDEX verleent service op alle meetinstrumenten uit haar leveringspakket en biedt de faciliteiten, kennis en hoog gekwalificeerd personeel voor (preventief) onderhoud, reparatie en kalibratie van uw meetinstrumenten.

Geautoriseerd Service Centrum

EURO-INDEX is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum.

Dit betekent dat uw instrumenten worden behandeld door goed opgeleid en kundig personeel, dat beschikt over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen gebruikt en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Service- en kalibratielaboratorium

EURO-INDEX beschikt over een bijzonder modern service- en kalibratielaboratorium met RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor verschillende grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



KWS®

KWS is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie. Veel zaken worden voor u geregeld, zodat u zonder zorgen gebruik kunt maken van uw meetinstrumenten. De kosten zijn laag en voorspelbaar.

Digitale toegang tot uw kalibratiecertificaten met Mijn KWS

Via het Mijn KWS webportal heeft u altijd en overal toegang tot uw kalibratiecertificaten en gerelateerde documenten.

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Deskundig advies
- Instrumenten worden geleverd met accessoirepakket en herleidbaar kalibratiecertificaat

EURO-INDEX Academy

- Producttrainingen (individueel en klassikaal)
- Seminars
- Demonstratie- en instructievideo's

Bekijk de video op ons YouTube kanaal en ontdek alles over KWS



Servicebalie



Kalibratie rookgasanalyse



Seminars en workshops



Kalibratie thermografie

Wijzigingen voorbehouden EURO-INDEX® VL 18001

Het Bluetooth® woord- en beeldmerk zijn eigendom van Bluetooth SIG, Inc. Gebruik van deze merken door EURO-INDEX geschiedt onder licentie.



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
info@euro-index.be
www.euro-index.be

NEDERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

