

P/N: 89401-0203

Copyright

© 2022, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 89401-0203

Commit: 88895

Language:

Modified: 2022-12-13

Formatted: 2022-12-13

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description	
<p>The FLIR Cx5 is certified for use in many explosive environments, eliminating the need to acquire hot work permits due to gas, vapor, and dust, while making T-Class surveys quick and easy.</p> <p>With FLIR MSX® (Multi-Spectral Dynamic Imaging) and 1-Touch Level/Span, the Cx5 can help you identify potential problems quickly to improve plant performance. The 3.5-inch touchscreen interface is simple to use, and 160 × 120 thermal resolution gives you accurate temperature measurement of nearby targets. Built-in FLIR Ignite™ cloud service provides direct data transfer, storage, and backup, so images are always available and securely stored on all your devices. With the FLIR Cx5 in your toolbox, you'll always be ready to investigate mechanical and electrical equipment around your production site.</p>	
Imaging and optical data	
IR resolution	160 × 120 pixels
Thermal sensitivity/NETD	< 70 mK
Field of view (FOV)	54° × 42°
Minimum focus distance	<ul style="list-style-type: none"> Thermal: 0.1 m (0.32 ft) MSX: 0.3 m (0.98 ft)
Spatial resolution (IFOV)	6.3 mrad/pixel
F-number	1.1
Image frequency	8.7 Hz
Focus	Focus free
Digital zoom	Yes, zoom pinch, 1–4× continuous
Detector data	
Detector type	Focal plane array, uncooled microbolometer
Spectral range	8–14 μm
Detector pitch	12 μm
Image presentation	
Display resolution	640 × 480 pixels
Screen size	3.5 in
Aspect ratio	4:3
Auto orientation	Yes
Touch screen	Yes, capacitive

P/N: 89401-0203

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

Image presentation	
Display technology	IPS
Image adjustment	<ul style="list-style-type: none"> • Automatic level and span • Manual level and span • 1-Touch level and span
Image modes	<ul style="list-style-type: none"> • Infrared image • Visual image • MSX • Picture in picture (IR area on visual image)
Gallery	Yes, incl. thumbnails and custom folder structure
Measurement	
Object temperature range	-20 to 400°C (-4 to 752°F)
Accuracy at ambient temp. 15 to 35°C (59 to 95° F) and object temp. above 0°C (32°F)	<ul style="list-style-type: none"> • 0 to 100°C (32 to 212°F): ±5°C (±9°F) • 100 to 400°C (212 to 752°F): ±5%
Measurement analysis	
Measurement functions	<ul style="list-style-type: none"> • Spot • Box with max./min.
Measurements correction	<ul style="list-style-type: none"> • Emissivity; matt/semi-matt/semi-glossy + custom value • Reflected apparent temperature <ul style="list-style-type: none"> ◦ Atmospheric compensation
Color palettes	<ul style="list-style-type: none"> • Iron • Gray • Rainbow • Arctic • Lava • Rainbow HC
Set-up	
Set-up commands	<ul style="list-style-type: none"> • Local adaptation of units, language, date and time formats • Screen brightness (high, medium, low)
Languages	Arabic, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, simplified Chinese, Spanish, Swedish, traditional Chinese, Turkish
Service functions	
Camera software update	<ul style="list-style-type: none"> • Automatic over Wi-Fi • USB via computer
Storage of images	
Storage media	Internal memory and onboard FLIR Ignite cloud connectivity (with Wi-Fi)
Image storage capacity	> 5000 sets of images
Image file format	Standard JPEG, 14-bit measurement data included
Image annotations	
Text	Soft keyboard on touchscreen, auto-prompt for note when image is saved

P/N: 89401-0203

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

Video streaming	
Non-radiometric video streaming	Yes; MSX, Thermal, Visual, Picture in Picture. USB Video Class colorized uncompressed with overlay 9 Hz.
Digital camera	
Resolution	5 MP
Focus	Fixed
Field of view	71.5 ° × 56° (84° diagonal)
Video lamp	Yes
Data communication interfaces	
Wi-Fi	802.11 a/ac/b/g/n (2.4 and 5 GHz) (5 GHz only for indoor use in Japan and Canada)
USB	USB 2.0, Type-C connector
Bluetooth	PAN
Radio	
Wi-Fi	<ul style="list-style-type: none"> • Standard: 802.11 a/b/g/n (HT20) • Frequency range: <ul style="list-style-type: none"> ◦ 2401–2473 MHz ◦ 5150–5250 MHz • Max. output power: 15 dBm
Bluetooth + EDR	<ul style="list-style-type: none"> • Frequency range: <ul style="list-style-type: none"> ◦ 2400–2484 MHz • Max. output power: 10 dBm
Power system	
Battery type	Rechargeable Li ion battery (built-in)
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery operating time	4 hours
Battery charge life	>500 cycles
Charging system	USB-C (1 A)
Charging time	2 hours
Charging temperature	35°C (95°F)
External power operation	5 V, USB-C
Power management	Adjustable stand-by and automatic shut-down
Battery documents	For documents like MSDS and UN38.3 test reports/summaries, see: https://support.flir.com/resources/msds
Environmental data	
Operating temperature range	–10°C to 50°C (14°F to 122°F)
Storage temperature range	–40°C to 70°C (–40°F to 158°F)
EMC	<ul style="list-style-type: none"> • EN 301 487-1 • EN 301 489-17 • FCC 47 CFR Part 15 Class B
Magnetic fields	EN 61000-4-8 level 5

P/N: 89401-0203

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

Environmental data	
Radio spectrum	<ul style="list-style-type: none"> ETSI EN 300 328 EN 301 489 FCC Title 47 CFR Part 15 RSS-247 Issue 2
Battery regulations	<ul style="list-style-type: none"> UL 1642 EN 62133 ed 2
Battery charging efficiency	<ul style="list-style-type: none"> BC Title 20 10 CFR Section 430.23 (aa)
Drop	Designed for 2 m (6.56 ft)
Humidity (operating and storage)	ATEX Directive 2014/34/EU
Relative humidity	
Encapsulation	
Shock	
Vibration	
Safety	
Environmental safety	
Certifications	<ul style="list-style-type: none"> EN IEC 60079-0:2018 EN IEC 60079-15:2019 EN 60079-31:2014 IEC 60079-0:2017 IEC 60079-15:2017 IEC 60079-31:2013
Certificates and declarations of conformity	See: https://support.flir.com/resources/cx/
Physical data	
Weight	<ul style="list-style-type: none"> ExN case: 0.49 kg (1.08 lb) ExN case + FLIR C5 camera: 0.69 kg (1.52 lb)
Size (L x W x H)	168 x 112 x 42 mm (6.6 x 4.4 x 1.7 in)
Tripod mounting	UNC 1/4"-20
Housing material	Aluminum
Color	Black
Warranty and service	
Warranty	http://www.flir.com/warranty/
Shipping information	
Packaging, type	Cardboard box
Packaging, contents	<ul style="list-style-type: none"> Cx5 FLIR Thermal Studio Starter Wrist strap lanyard USB cable Restricted breathing test port Pouch Printed documentation
Packaging, weight	0.825 kg (including Cx5) (1.82 lb)
Packaging, size	205 x 61 x 155 mm (8.1 x 2.4 x 6.1 in)
EAN-13	4743254006119
UPC-12	845188026998
Country of origin	<ul style="list-style-type: none"> ExN case: United Kingdom FLIR C5 camera: Estonia



FLIR Cx5

P/N: 89401-0203


© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

Supplies & accessories:

- T911940ACC; USB 2.0 A to USB Type-C cable, 1.0 m
- T199871; Traceable Calibration for C5
- T300083; FLIR Thermal Studio Pro, Perpetual license
- T300341; FLIR Thermal Studio Standard, 1 Year Subscription
- T300258; FLIR Thermal Studio Standard, Perpetual license

© 2016, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

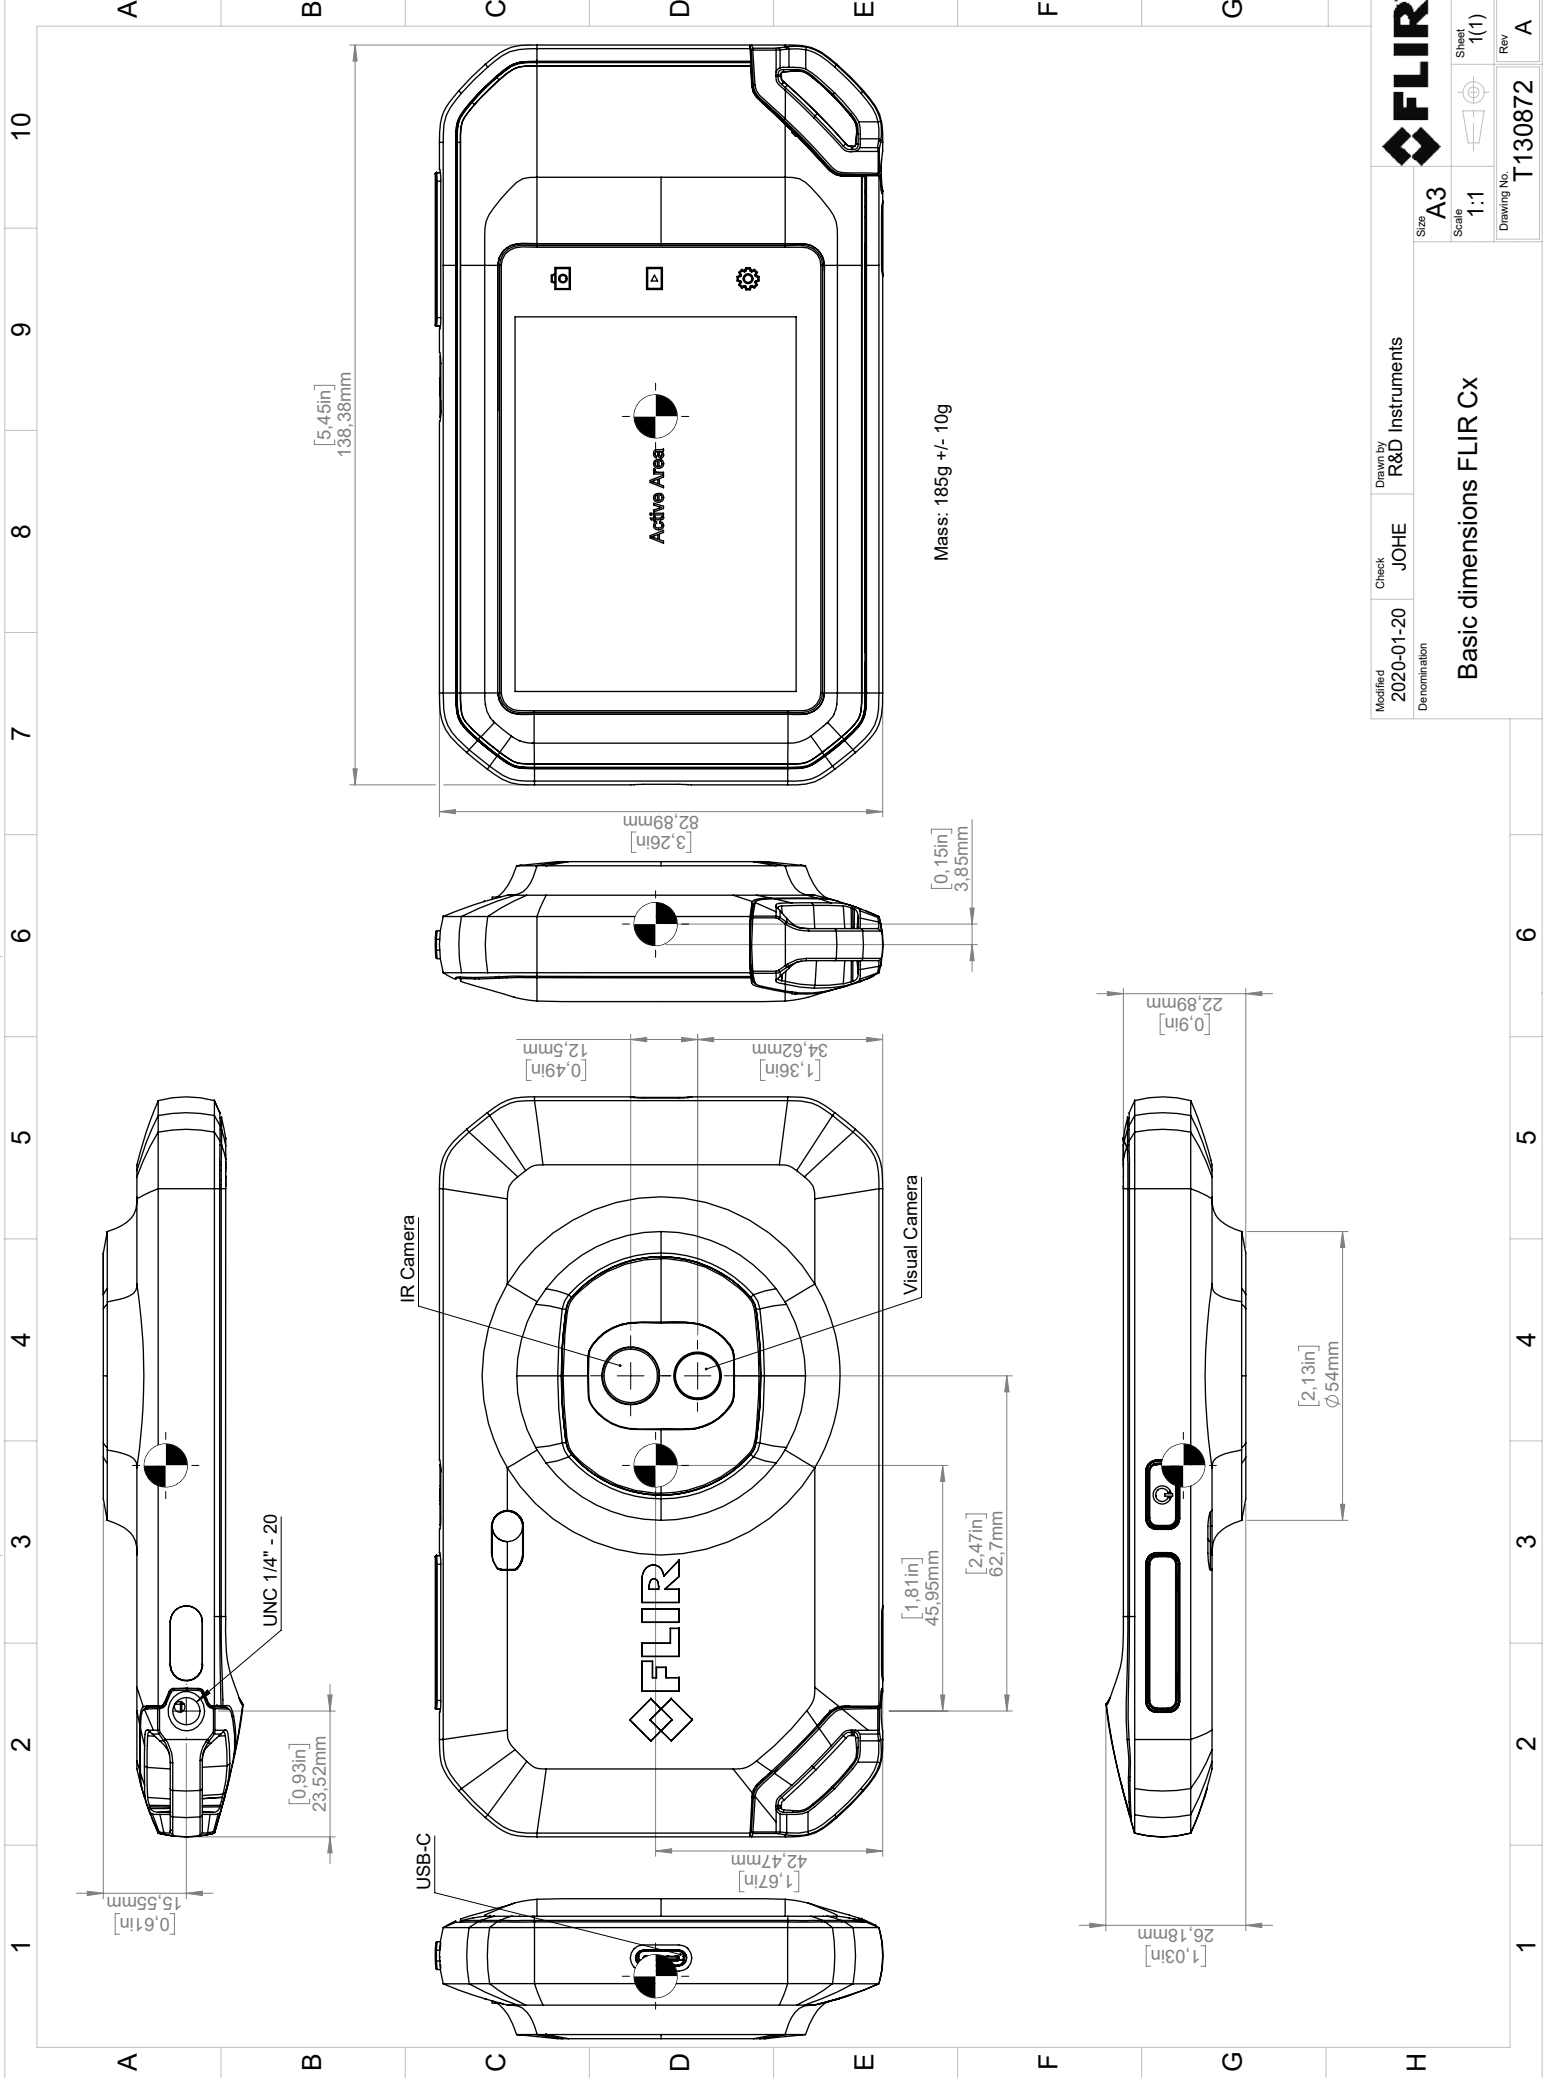

Modified 2020-01-20	Check JOHE	Drawn by R&D Instruments	FLIR
Denomination Basic dimensions FLIR Cx			Sheet 1(1)
Size A3			Rev A
Scale 1:1			Drawing No. T130872

Services d'EURO-INDEX

EURO-INDEX est un fabricant, importateur et distributeur de diverses marques A dans le domaine des instruments de test et de mesure. Nous fournissons également une large gamme de services pour optimiser l'utilisation de ces instruments dans vos activités. Ces services comprennent naturellement l'entretien, la réparation et l'étalonnage des instruments, mais nous proposons aussi une assistance sous forme de formation via notre EURO-INDEX Academy et la location d'instruments.

Centre de Service Agréé

EURO-INDEX est un Centre de Service Agréé pour toutes les marques représentées. Cela signifie que vos instruments sont pris en charge par des techniciens formés par le fabricant et disposant des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument, ainsi que les certifications (ATEX, EN50379, etc.) restent intactes.

Laboratoire de maintenance et de calibrage

Le laboratoire des Pays-Bas est accrédité RvA selon la norme EN-ISO/IEC 17025. Cette accréditation est valable pour différentes grandeurs, telles que spécifiées dans le champ d'application associé au numéro d'accréditation K105. Les certificats de calibrage RvA sont acceptés à l'international et équivalents à ceux de BELAC.



Service Mobile

Outre les laboratoires d'étalonnage fixes de Zaventem et de Capelle aan den IJssel, nous disposons également d'un laboratoire itinérant appelé "Service mobile". Nos services peuvent venir vers vous, en offrant une qualité équivalente.

MQS®

MQS® est une formule d'entretien exclusive comportant un entretien et un calibrage périodiques de vos instruments de mesure à un coût fixe et faible. Via un portail Web gratuit (monmq.be), vous avez toujours accès à vos certificats de calibrage.

Location d'instruments de mesure

- Vaste assortiment
- Précision démontrable par le certificat d'étalonnage actuel
- Conseils avisés
- Les instruments sont livrés avec leurs accessoires

EURO-INDEX Academy

- Formations et séminaires
- Vidéos de démonstration et d'instruction
- Notes d'application



Comptoir de service



Entretien, réparation et calibrage



Formations et séminaires



Service Mobile

Sous réserve de modifications EURO-INDEX® FR 23001



BELGIQUE
Chaussée de Louvain 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
sales@euro-index.be
www.euro-index.be

PAYS-BAS
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

