

## P/N: 89401-0203

### Copyright

© 2022, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

### Document identity

Publ. No.: 89401-0203

Commit: 88895

Language:

Modified: 2022-12-13

Formatted: 2022-12-13

### Website

<http://www.flir.com>

### Customer support

<http://support.flir.com>

### Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to [exportquestions@flir.com](mailto:exportquestions@flir.com) with any questions.



<b>General description</b>	
<p>The FLIR Cx5 is certified for use in many explosive environments, eliminating the need to acquire hot work permits due to gas, vapor, and dust, while making T-Class surveys quick and easy.</p> <p>With FLIR MSX® (Multi-Spectral Dynamic Imaging) and 1-Touch Level/Span, the Cx5 can help you identify potential problems quickly to improve plant performance. The 3.5-inch touchscreen interface is simple to use, and 160 × 120 thermal resolution gives you accurate temperature measurement of nearby targets. Built-in FLIR Ignite™ cloud service provides direct data transfer, storage, and backup, so images are always available and securely stored on all your devices. With the FLIR Cx5 in your toolbox, you'll always be ready to investigate mechanical and electrical equipment around your production site.</p>	
<b>Imaging and optical data</b>	
IR resolution	160 × 120 pixels
Thermal sensitivity/NETD	< 70 mK
Field of view (FOV)	54° × 42°
Minimum focus distance	<ul style="list-style-type: none"> <li>Thermal: 0.1 m (0.32 ft)</li> <li>MSX: 0.3 m (0.98 ft)</li> </ul>
Spatial resolution (IFOV)	6.3 mrad/pixel
F-number	1.1
Image frequency	8.7 Hz
Focus	Focus free
Digital zoom	Yes, zoom pinch, 1–4× continuous
<b>Detector data</b>	
Detector type	Focal plane array, uncooled microbolometer
Spectral range	8–14 μm
Detector pitch	12 μm
<b>Image presentation</b>	
Display resolution	640 × 480 pixels
Screen size	3.5 in
Aspect ratio	4:3
Auto orientation	Yes
Touch screen	Yes, capacitive

P/N: 89401-0203

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

<b>Image presentation</b>	
Display technology	IPS
Image adjustment	<ul style="list-style-type: none"> <li>• Automatic level and span</li> <li>• Manual level and span</li> <li>• 1-Touch level and span</li> </ul>
Image modes	<ul style="list-style-type: none"> <li>• Infrared image</li> <li>• Visual image</li> <li>• MSX</li> <li>• Picture in picture (IR area on visual image)</li> </ul>
Gallery	Yes, incl. thumbnails and custom folder structure
<b>Measurement</b>	
Object temperature range	-20 to 400°C (-4 to 752°F)
Accuracy at ambient temp. 15 to 35°C (59 to 95° F) and object temp. above 0°C (32°F)	<ul style="list-style-type: none"> <li>• 0 to 100°C (32 to 212°F): ±5°C (±9°F)</li> <li>• 100 to 400°C (212 to 752°F): ±5%</li> </ul>
<b>Measurement analysis</b>	
Measurement functions	<ul style="list-style-type: none"> <li>• Spot</li> <li>• Box with max./min.</li> </ul>
Measurements correction	<ul style="list-style-type: none"> <li>• Emissivity; matt/semi-matt/semi-glossy + custom value</li> <li>• Reflected apparent temperature <ul style="list-style-type: none"> <li>◦ Atmospheric compensation</li> </ul> </li> </ul>
Color palettes	<ul style="list-style-type: none"> <li>• Iron</li> <li>• Gray</li> <li>• Rainbow</li> <li>• Arctic</li> <li>• Lava</li> <li>• Rainbow HC</li> </ul>
<b>Set-up</b>	
Set-up commands	<ul style="list-style-type: none"> <li>• Local adaptation of units, language, date and time formats</li> <li>• Screen brightness (high, medium, low)</li> </ul>
Languages	Arabic, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, simplified Chinese, Spanish, Swedish, traditional Chinese, Turkish
<b>Service functions</b>	
Camera software update	<ul style="list-style-type: none"> <li>• Automatic over Wi-Fi</li> <li>• USB via computer</li> </ul>
<b>Storage of images</b>	
Storage media	Internal memory and onboard FLIR Ignite cloud connectivity (with Wi-Fi)
Image storage capacity	> 5000 sets of images
Image file format	Standard JPEG, 14-bit measurement data included
<b>Image annotations</b>	
Text	Soft keyboard on touchscreen, auto-prompt for note when image is saved

**P/N: 89401-0203**

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

<b>Video streaming</b>	
Non-radiometric video streaming	Yes; MSX, Thermal, Visual, Picture in Picture. USB Video Class colorized uncompressed with overlay 9 Hz.
<b>Digital camera</b>	
Resolution	5 MP
Focus	Fixed
Field of view	71.5 ° × 56° (84° diagonal)
Video lamp	Yes
<b>Data communication interfaces</b>	
Wi-Fi	802.11 a/ac/b/g/n (2.4 and 5 GHz) (5 GHz only for indoor use in Japan and Canada)
USB	USB 2.0, Type-C connector
Bluetooth	PAN
<b>Radio</b>	
Wi-Fi	<ul style="list-style-type: none"> <li>• Standard: 802.11 a/b/g/n (HT20)</li> <li>• Frequency range:               <ul style="list-style-type: none"> <li>◦ 2401–2473 MHz</li> <li>◦ 5150–5250 MHz</li> </ul> </li> <li>• Max. output power: 15 dBm</li> </ul>
Bluetooth + EDR	<ul style="list-style-type: none"> <li>• Frequency range:               <ul style="list-style-type: none"> <li>◦ 2400–2484 MHz</li> </ul> </li> <li>• Max. output power: 10 dBm</li> </ul>
<b>Power system</b>	
Battery type	Rechargeable Li ion battery (built-in)
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery operating time	4 hours
Battery charge life	>500 cycles
Charging system	USB-C (1 A)
Charging time	2 hours
Charging temperature	35°C (95°F)
External power operation	5 V, USB-C
Power management	Adjustable stand-by and automatic shut-down
Battery documents	For documents like MSDS and UN38.3 test reports/summaries, see: <a href="https://support.flir.com/resources/msds">https://support.flir.com/resources/msds</a>
<b>Environmental data</b>	
Operating temperature range	–10°C to 50°C (14°F to 122°F)
Storage temperature range	–40°C to 70°C (–40°F to 158°F)
EMC	<ul style="list-style-type: none"> <li>• EN 301 487-1</li> <li>• EN 301 489-17</li> <li>• FCC 47 CFR Part 15 Class B</li> </ul>
Magnetic fields	EN 61000-4-8 level 5

**P/N: 89401-0203**

© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

<b>Environmental data</b>	
Radio spectrum	<ul style="list-style-type: none"> <li>ETSI EN 300 328</li> <li>EN 301 489</li> <li>FCC Title 47 CFR Part 15</li> <li>RSS-247 Issue 2</li> </ul>
Battery regulations	<ul style="list-style-type: none"> <li>UL 1642</li> <li>EN 62133 ed 2</li> </ul>
Battery charging efficiency	<ul style="list-style-type: none"> <li>BC Title 20</li> <li>10 CFR Section 430.23 (aa)</li> </ul>
Drop	Designed for 2 m (6.56 ft)
Humidity (operating and storage)	ATEX Directive 2014/34/EU
Relative humidity	
Encapsulation	
Shock	
Vibration	
Safety	
Environmental safety	
Certifications	<ul style="list-style-type: none"> <li>EN IEC 60079-0:2018</li> <li>EN IEC 60079-15:2019</li> <li>EN 60079-31:2014</li> <li>IEC 60079-0:2017</li> <li>IEC 60079-15:2017</li> <li>IEC 60079-31:2013</li> </ul>
Certificates and declarations of conformity	See: <a href="https://support.flir.com/resources/cx/">https://support.flir.com/resources/cx/</a>
<b>Physical data</b>	
Weight	<ul style="list-style-type: none"> <li>ExN case: 0.49 kg (1.08 lb)</li> <li>ExN case + FLIR C5 camera: 0.69 kg (1.52 lb)</li> </ul>
Size (L x W x H)	168 x 112 x 42 mm (6.6 x 4.4 x 1.7 in)
Tripod mounting	UNC 1/4"-20
Housing material	Aluminum
Color	Black
<b>Warranty and service</b>	
Warranty	<a href="http://www.flir.com/warranty/">http://www.flir.com/warranty/</a>
<b>Shipping information</b>	
Packaging, type	Cardboard box
Packaging, contents	<ul style="list-style-type: none"> <li>Cx5</li> <li>FLIR Thermal Studio Starter</li> <li>Wrist strap lanyard</li> <li>USB cable</li> <li>Restricted breathing test port</li> <li>Pouch</li> <li>Printed documentation</li> </ul>
Packaging, weight	0.825 kg (including Cx5) (1.82 lb)
Packaging, size	205 x 61 x 155 mm (8.1 x 2.4 x 6.1 in)
EAN-13	4743254006119
UPC-12	845188026998
Country of origin	<ul style="list-style-type: none"> <li>ExN case: United Kingdom</li> <li>FLIR C5 camera: Estonia</li> </ul>



## FLIR Cx5

---

**P/N: 89401-0203**


© 2022, FLIR Systems, Inc.

#89401-0203; r. 88895;

**Supplies & accessories:**

- T911940ACC; USB 2.0 A to USB Type-C cable, 1.0 m
- T199871; Traceable Calibration for C5
- T300083; FLIR Thermal Studio Pro, Perpetual license
- T300341; FLIR Thermal Studio Standard, 1 Year Subscription
- T300258; FLIR Thermal Studio Standard, Perpetual license

© 2016, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

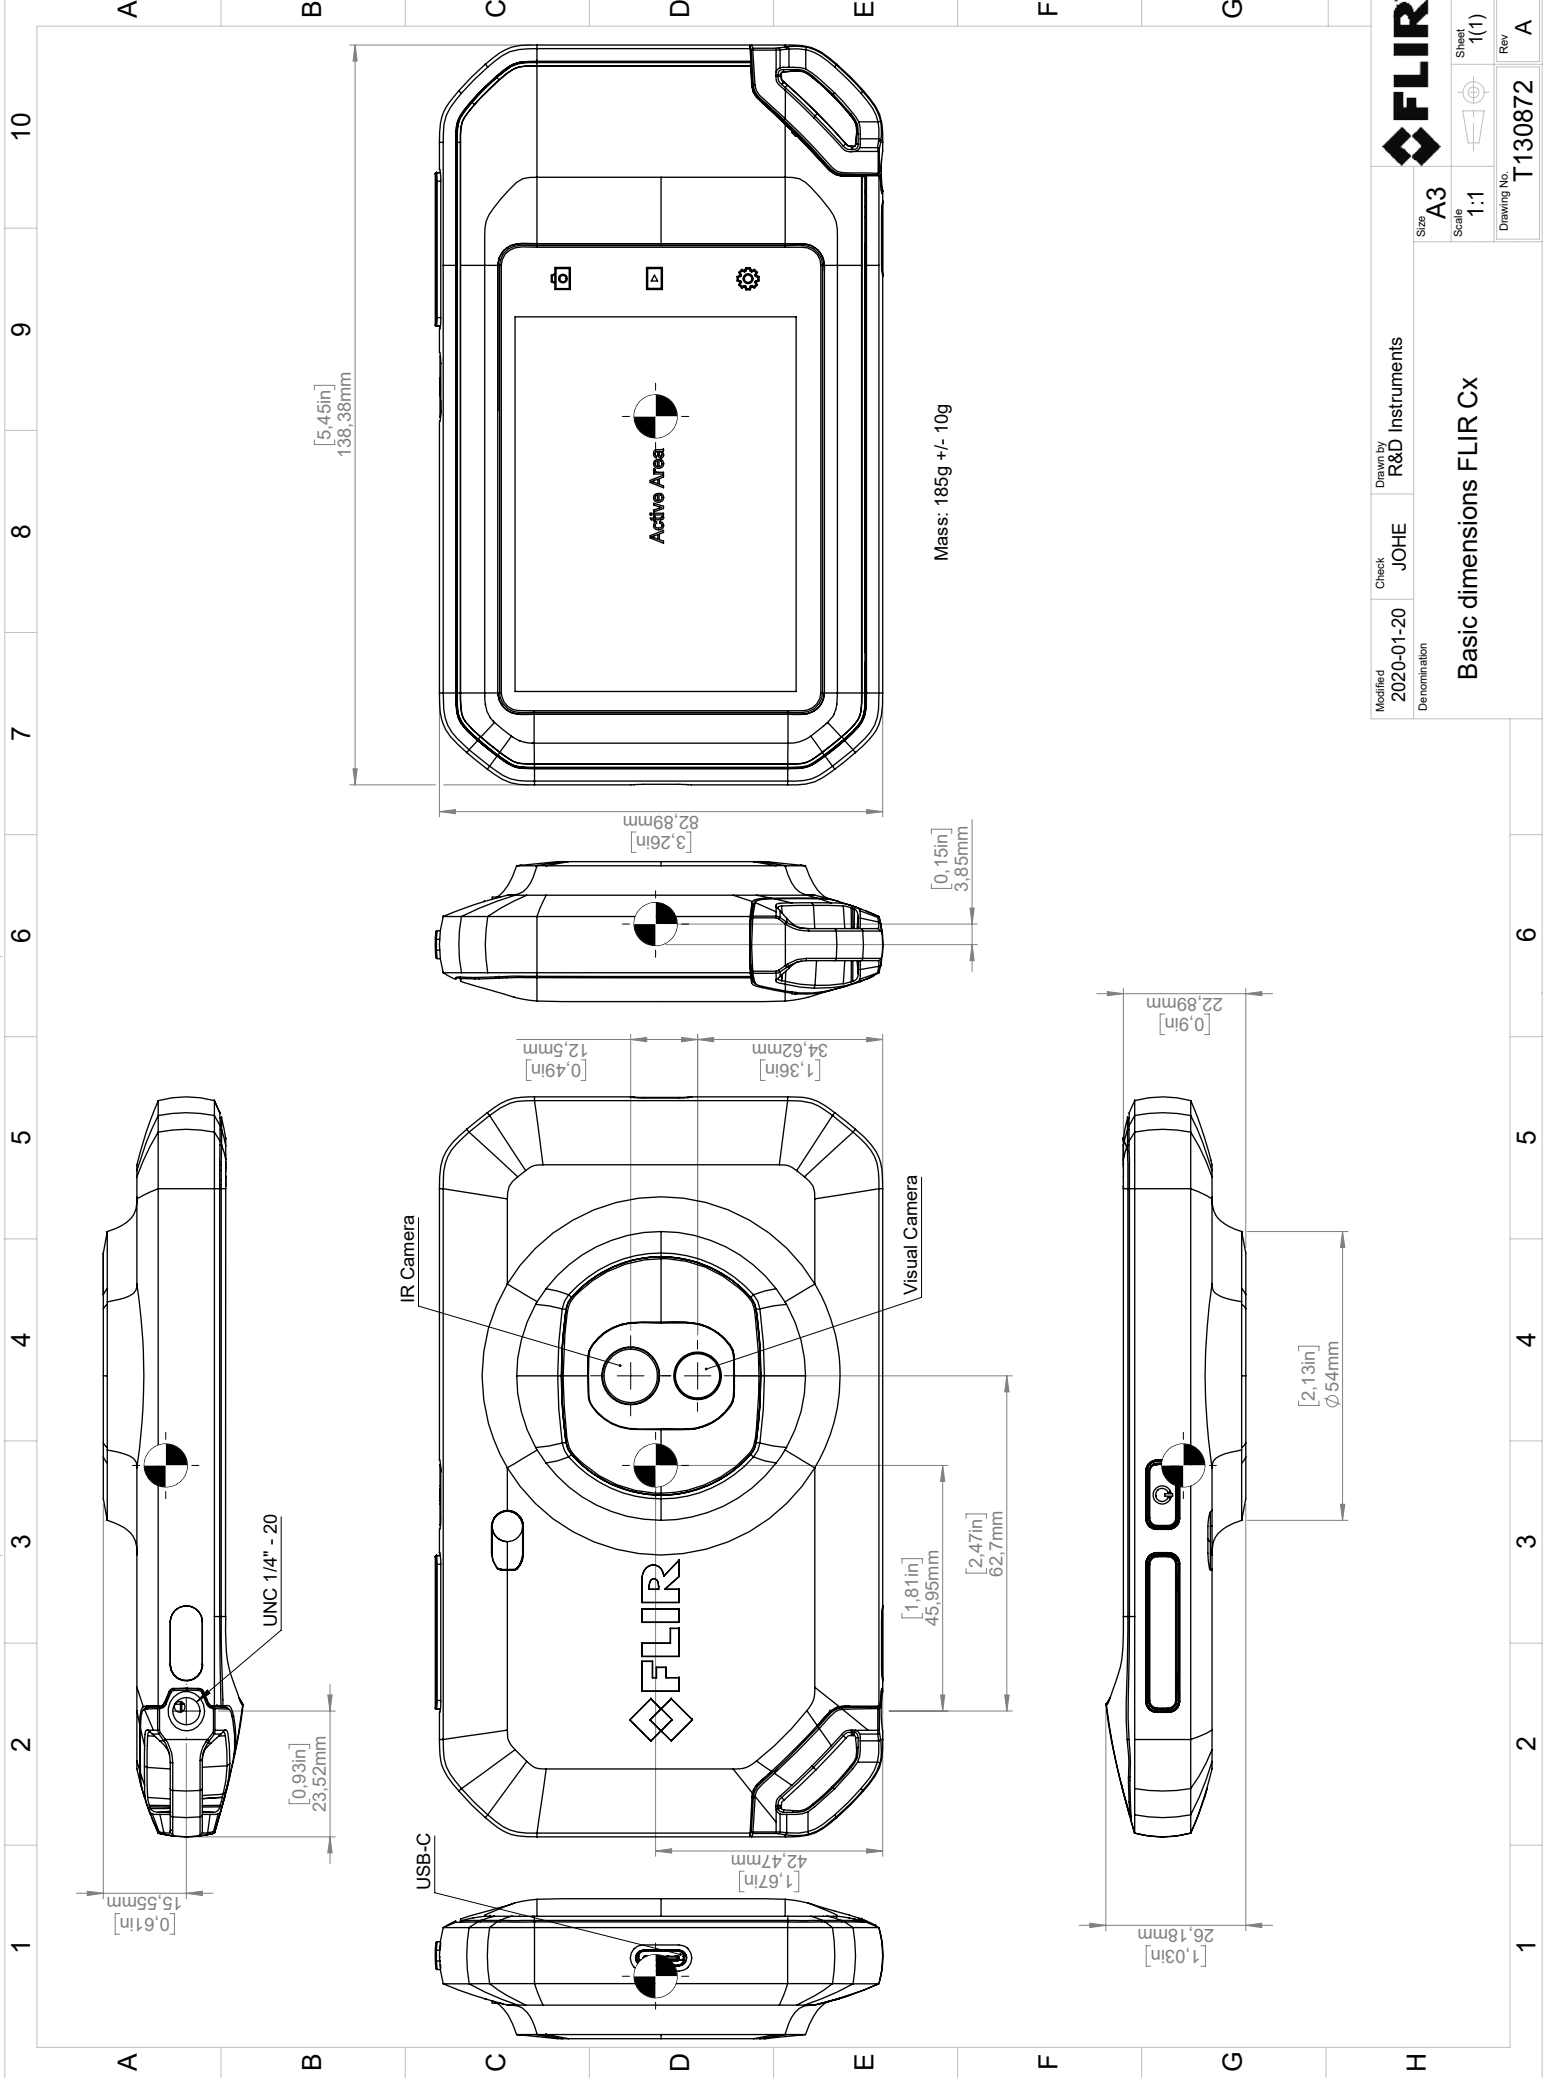

Modified 2020-01-20	Check JOHE	Drawn by R&D Instruments	FLIR
Denomination <b>Basic dimensions FLIR Cx</b>			Sheet 1(1)
Size A3	Scale 1:1	Drawing No. T130872	Rev A

# Diensten van EURO-INDEX

EURO-INDEX is fabrikant, importeur en distributeur van diverse A-merken op het gebied van test- en meetinstrumenten. Daarnaast leveren wij een groot aantal diensten om het gebruik van deze instrumenten in uw bedrijfsvoering te optimaliseren. Dit omvat uiteraard onderhoud, reparatie en kalibratie van de instrumenten, maar ook kennisdeling via EURO-INDEX Academy en verhuur van instrumenten.

## Geautoriseerd Service Centrum

EURO-INDEX b.v. is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum. Dit betekent dat uw instrumenten worden behandeld door technici die zijn opgeleid door de fabrikant en beschikken over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen toegepast en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

## Kalibratielaboratorium

Het laboratorium in Nederland beschikt over een RvA accreditatie naar EN-ISO/IEC 17025. Deze accreditatie geldt voor grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105. RvA kalibratiecertificaten zijn internationaal geaccepteerd en is gelijkwaardig aan BELAC.



## Mobiele Service

Naast de vaste kalibratielaboratoria in Zaventem en Capelle aan den IJssel beschikken wij ook over een laboratorium op wielen met de naam "Mobiele Service". Dit biedt vertrouwde service en kwaliteit, bij u voor de deur!

## KWS®

KWS® is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie tegen vaste, lage kosten. Via een gratis webportal ([mijnkws.be](http://mijnkws.be)) heeft u altijd en overal beschikking over uw kalibratiecertificaten.

## Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Nauwkeurigheid aantoonbaar door actueel kalibratiecertificaat
- Deskundig advies
- Complete levering inclusief accessoires

## EURO-INDEX Academy

- Trainingen, seminars en workshops
- Demonstratie- en instructievideo's
- Application notes



Servicebalie



Onderhoud, reparatie en kalibratie



Trainingen en seminars



Mobiele Service

Wijzigingen voorbehouden EURO-INDEX® VL 23001



**BELGIË**  
Leuvensesteenweg 607  
1930 Zaventem  
T: 02 - 757 92 44  
F: 02 - 757 92 64  
[sales@euro-index.be](mailto:sales@euro-index.be)  
[www.euro-index.be](http://www.euro-index.be)

**NETHERLAND**  
Rivium 2e straat 12  
2909 LG Capelle a/d IJssel  
T: +31 - (0)10 - 2 888 000  
F: +31 - (0)10 - 2 888 010  
[verkoop@euro-index.nl](mailto:verkoop@euro-index.nl)  
[www.euro-index.nl](http://www.euro-index.nl)

