


# Fluke Bench Multimeters



**8845A/8846A 6.5 digit multimeters:** Precision multimeter for bench or automated test system applications

**8808A 5.5 digit multimeter:** Versatile multimeter for manufacturing, development and service applications

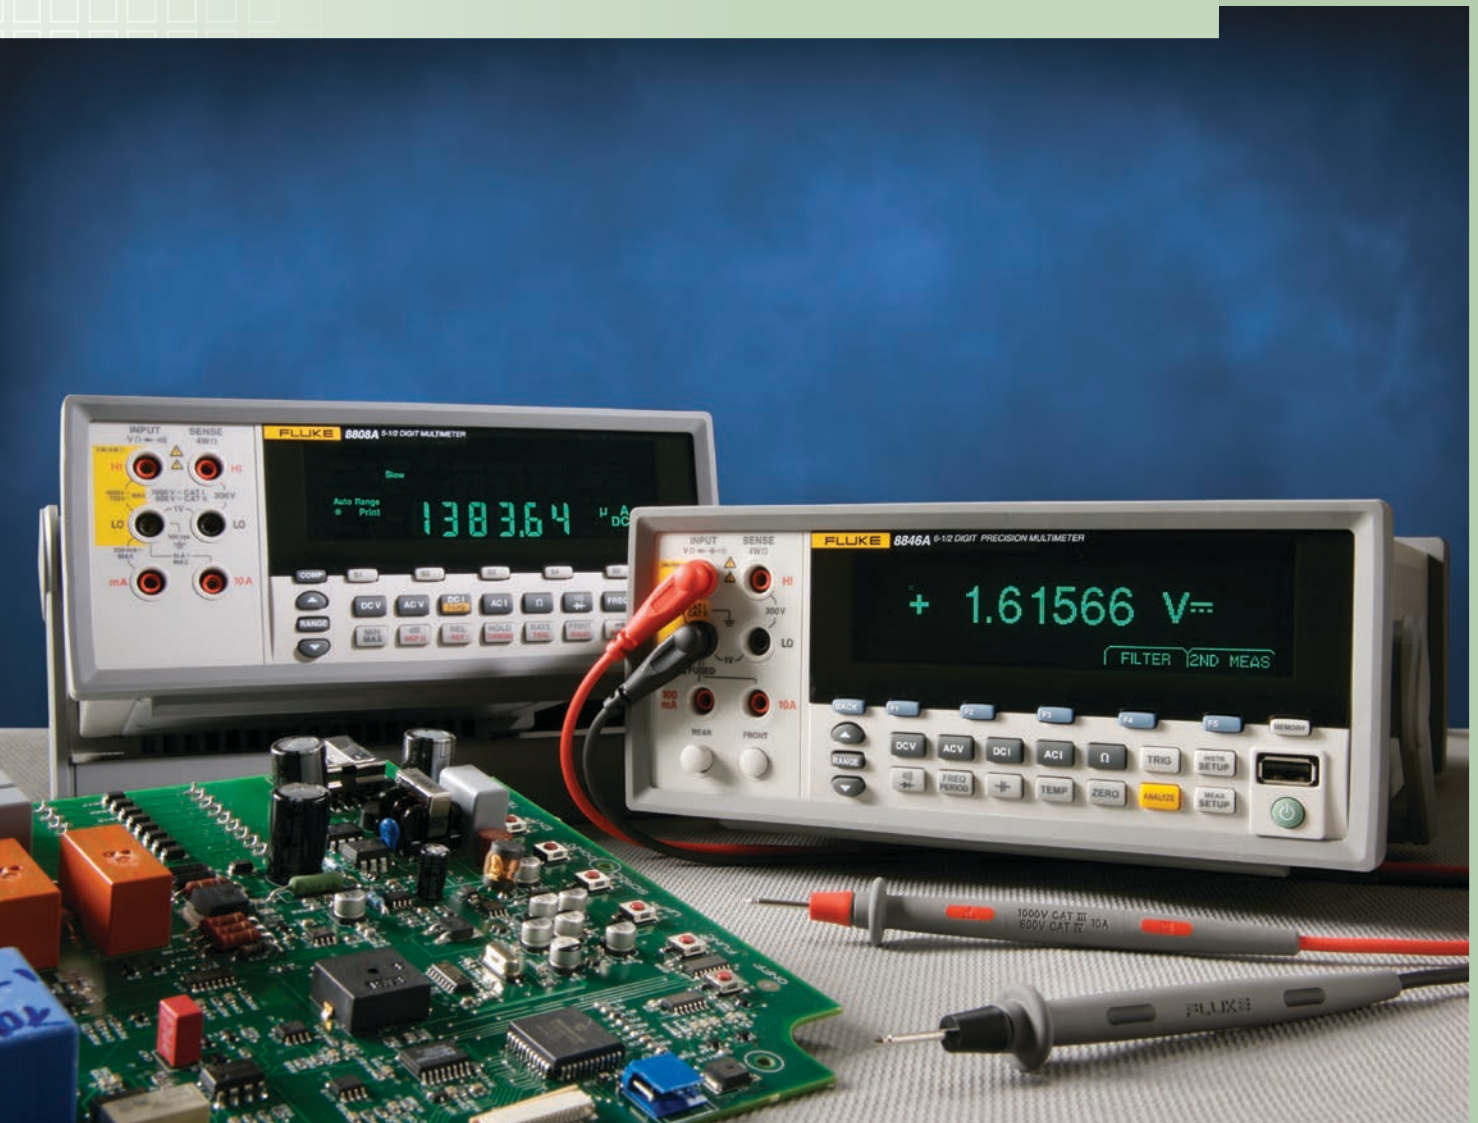



With 14 measurement functions, math and analysis modes, the 8845A/8846A will meet the needs of any test, research and development, or service application.

# Exceed your expectations for performance and value

**The Fluke 8845A and 8846A 6.5 digit precision CAT II 600 V multimeters** have the precision and versatility to handle your most demanding measurements, on the bench or in a system. These meters are both high performance and feature rich, yet also remarkably easy to use.

These digital multimeters perform the functions you would expect to see in a multifunction DMM, including measuring volts, ohms, and amps. Basic V dc accuracy of up to 0.0024 %, 100 uA to 10 A current ranges, and a wide ohms range from 10 Ohms to 1 GOhm give you an unbeatable combination of measurement capability.

You can also use the 8845A and 8846A to measure temperature, capacitance, period, and frequency—the functions of a counter, capacitance meter, and thermometer are built in for unparalleled versatility.

Extend the meters' utility even more with their graphical display modes, including Trendplot™ paperless recorder mode, statistics and histograms—Log readings to a USB flash drive and easily transfer them over to a PC with the 8846A USB device host port—features you won't find on other multimeters.

Of course, these meters are also durable and dependable, features you expect from any Fluke meter. This unique combination of features and performance makes the 8845A and 8846A an unbeatable value for a wide variety of applications, including manufacturing test, research and development, and service.

## 8845A/8846A features at a glance

- 6.5 digit resolution
- Basic V dc accuracy of up to 0.0024 %
- Dual display
- 100 uA to 10 A current range, with up to 100 pA resolution
- Wide ohms ranges from 10 Ω to 1 GΩ with up to 10 μΩ resolution
- 2 x 4 ohms 4-wire measurement technique
- Measures frequency and period
- Measures capacitance and RTD temperature (8846A)
- USB memory drive port (8846A)
- Fluke 45 and Agilent 34401A remote command emulation
- Graphical display
- Trendplot™ paperless recorder mode, statistics, histogram
- CAT I 1000 V, CAT II 600 V

Handle even the most demanding measurements with high accuracy and 6.5 digit resolution.



Use the built-in TrendPlot paperless chart recorder to graphically identify the extent of drift and intermittent events in analog circuits.



View results in Histogram mode to reveal stability or noise problems in analog circuits.





# A perfect fit for many applications, in a system or on the bench

## Dual display and versatile graphical capabilities

The 8845A/8846A feature a unique dual display that allows you to measure two different parameters of the same signal from one test connection. Looking at dual interrelated parameters like voltage and current simultaneously can reveal conditions that might go unnoticed otherwise, greatly simplifying test and troubleshooting.

## Versatile solutions for advanced test applications

These meters let you take test and troubleshooting to a new level. Set up the 8845A or 8846A to take measurements over a period of time and display them graphically on the DMM's screen, for real time analysis. To reveal signal quality issues like drift, intermittants and stability, view data as a real time trend plot or histogram, with the unique analyze mode. You won't find graphical display capabilities like these on any other instrument in this class.

Graphical trending analysis can highlight drift and signal fluctuations, as well as intermittent errors that can't be seen on a numerical display.

Using the graphical display, the 8845A and 8846A can simultaneously display a histogram and multiple statistical values such as mean, min, max and standard deviation calculated using real time measurements. Analyzing a measured values distribution over time can highlight potential reoccurring out-of-tolerance problems. The ability to make dual simultaneous measurements and display them in graphic or numeric format adds new tools to the test system and design engineer's toolbox of tricks for solving or validating analog circuits.

Save measurement results to USB memory and transfer the data to a PC for detailed analysis. Or use the Ethernet connection to transport data over a network.

Extended current and ohms ranges and additional capabilities such as temperature and capacitance increase the variety of measurements you can make and tests you can perform with a single instrument.

## Perfect for bench-top research and development

Research and development applications demand measurement performance and flexibility. The 8845A and 8846A meet these needs, with excellent performance in all measurement functions. It's easy to use and adapts easily to almost any benchtop application.

## Fluke 45 and Agilent 34401A emulation

The 8845A/8846A emulate programming commands of the Fluke 45 and Agilent 34401A. Emulation shortens the learning curve and makes it easy to fit the 8845A or 8846A into existing test systems.



**Easy to integrate into your automated test system**

Front and rear inputs let you easily make connections where it's most convenient, whether the meter is rack-mounted or used on a bench. Multiple interfaces provide compatibility to existing and new standards.

Reading rates are up to 1000 readings per second, giving you the throughput you need for systems applications.


**Multiple connectors give you maximum flexibility**

Choose from several interfaces to connect the 8845A/8846A to a personal computer: serial, IEEE-488, and Ethernet come standard on both models. A USB device port is included on the 8846A meter for convenient data transfer to and from a PC via a portable USB storage device.

With 6.5 digit performance, legacy DMM emulation and the latest interfaces, the 8845A/8846A will easily integrate into any legacy or new test system.





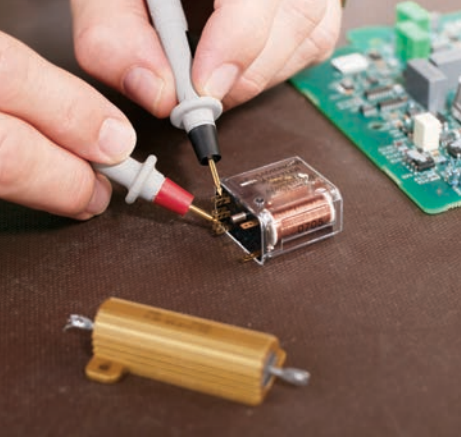

## Perform 4-wire measurements with only two leads

Patented split terminal jacks for the 2x4-wire ohms function allow you to perform 4-wire measurements using only two leads instead of four. Today's surface mount components make it difficult to make connections. The task becomes even more difficult when you need to use a 4-wire technique for accurate low ohms measurements. The Fluke test lead accessory combines the four wires into two test lead pairs, making it easy for you to establish connections. You get excellent resolution and accuracy, plus the convenience and ease of using a single pair of leads.

## Fluke support completes the equation of value

Like all Fluke products, the 8845A/8846A and 8808A are built to provide years of dependable service. However, if you do need calibration or repairs, you can turn to our global network of direct and representative service centers strategically located around the world. Each offers a full range of support services.

Patented split terminal jacks enable 4-wire measurements with two leads.



Input terminals are located on the front and back of the meter to simplify connections within a system.

Patented split terminal jacks enable 4-wire measurements with just two leads.

Clear and bright dual display lets you measure two different parameters of the same signal from one test connection.

Limit compare mode compares the current reading to predefined High and Low limits. If an out of tolerance reading occurs the display clearly shows the operator whether a test passes or fails. Used in combination with the front panel setup keys makes manual test processes simple, repeatable and efficient.

Clear and bright dual display shows data in graphic or numeric format.

Context sensitive soft function keys make it easy to navigate through measurements and instrument settings.


USB port for flash memory devices (8846A) provides convenient data storage and transport.

Single button per function for ease of use.



### FlukeView® Forms Basic

The Fluke 8845A/8846A and 8808A ship with a free copy of FlukeView Basic. FlukeView Forms increases the power of your Fluke tool by enabling you to document, store and analyze individual readings or series of measurements, then convert them into professional-looking documents. Transfer data points from your meter to your PC and use the two standard, non-customizable forms to display your readings in table or graphical form. For a larger array of forms or to use FlukeView® Forms Designer to customize your forms, upgrade to FlukeView® Forms version 3.0 with FVF-UG.

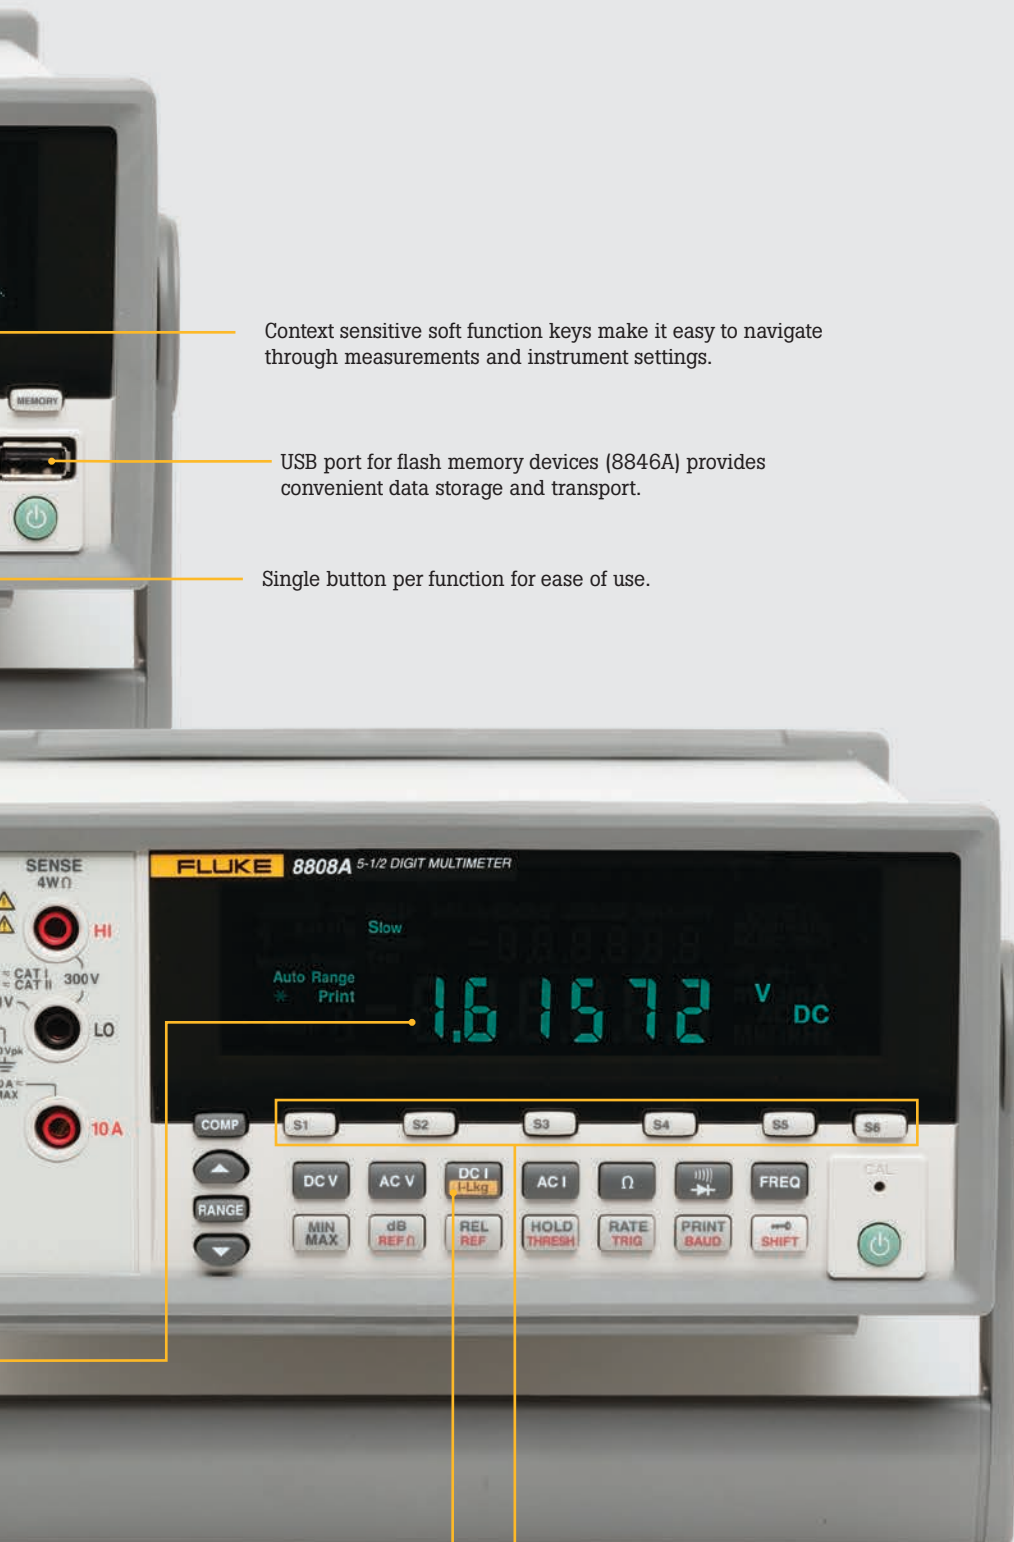

i-Lkg function adds two additional hi-impedance ranges for sensitive low current measurements

Setup keys make performing your most common measurements as simple as pressing a button. Increase quality and test times by improving test repeatability by simply saving known measurement setups to front panel accessible setup keys. All the operator has to do is select the right setup key.





The Fluke 8808A has six dedicated setup buttons on the front panel that function as 'pre-sets' similar to those on a car radio, making it fast and easy for production operators to quickly follow a test procedure without having to push multiple buttons. Setup buttons with pass/fail test mode provide measurement consistency that will improve quality and efficiency in manufacturing test applications. With measurement functions including volts, ohms, amps and frequency, the Fluke 8808A also provides the performance and flexibility required from a bench meter in R&D, development and service applications.



# Making measurements is as simple as pushing a button

FLUKE®

**The Fluke 8808A 5.5 digit multimeter** has a broad range of functions, measuring volts, ohms and amps with a basic V dc accuracy of 0.01 %. It is remarkably easy to use, even by unskilled operators, because it makes the measurements you perform most often extremely easy and fast to do.

Six setup buttons on the 8808A front panel operate like a car radio's station presets. Simply set up the meter for a common measurement, then press shift followed by a setup button (S1 to S6) to save the setup. Now each time you perform that measurement, you simply press the appropriate setup key. It's that easy!

The setup buttons eliminate the need to follow complex work instruction sheets. Operators no longer need to press multiple buttons to set up a measurement function and range, test limits, or enter other parameters to make a measurement.

## Eliminate production mistakes

The Fluke 8808A 5.5 digit multimeter dependably performs the most common measurements required by today's applications. Whether you are performing functional tests or making critical measurements on test points, using the limit compare mode with pass/fail indicators eliminates production mistakes, especially those where results are "on the edge."

The 8808A display has built-in enunciators that clearly show the operator whether a test passes or fails. The pass/fail indicators take the guesswork out of testing: the result is either within limits or it's out!

## 8808A features at a glance

- 5.5 digit resolution
- Basic V dc accuracy of 0.01 %
- Dual display
- Dedicated dc leakage current measurement
- 2x4 ohms 4-wire measurement technique
- Six dedicated buttons for fast access to instrument setups
- Hi/Lo limit compare for Pass/Fail testing

The 8808A can measure small leakage currents with a resolution of up to 100 nA, without loading the circuit under test.



Set up six common measurements via the front panel buttons, then simply press the appropriate key to perform each one.



The limit compare mode with pass/fail indicators can help you eliminate production mistakes.



# Improve quality and efficiency in manufacturing test, R&D or service applications

Manufacturing test, R&D, development and service applications demand performance and flexibility from a bench meter. This Fluke 8808A makes measurements that stand up to any scrutiny. It delivers a wide variety of measurement functions, including volts, ohms, and amps, plus frequency—all at superior accuracy and resolution.

## Measure two parameters at once

The 8808A features a unique dual display that allows you to measure two different parameters of the same signal from one test connection. Looking at dual interrelated parameters like voltage and current simultaneously can reveal conditions that might go unnoticed otherwise, greatly simplifying test and troubleshooting.

## Measure sensitive leakage current

Using a typical multimeter to perform a sensitive low current measurement of less than 100 mA can load the circuit under test while the measurement is made. This makes it difficult, if not impossible, to perform tasks such as determining the leakage current on a battery-powered device while it is powered down. The Fluke 8808A is the only multimeter in its class to use a high impedance input technique to perform this type of critical leakage current measurement. In this special mode, the 8808A can measure small currents with a resolution of up to 100 nA, without loading the circuit under test.

## Fluke quality is built in

Fluke is known around the world for its rugged, reliable, and accurate multimeters. With our experience, design standards and quality assurance processes, we have designed a multimeter that will stand up to any scrutiny of its specifications. In fact, a Fluke meter typically performs better than specified.


All of our efforts are designed to ensure that you can make an accurate measurement—repeatedly, and with confidence.





**Perform 4-wire measurements with only two leads**

Patented split terminal jacks for the 2x4-wire ohms function allow you to perform 4-wire measurements using only two leads instead of four. Today's surface mount components make it difficult to make connections. The task becomes even more difficult when you need to use a 4-wire technique for accurate low ohms measurements. The Fluke test lead accessory combines the four wires into two test lead pairs, making it easy for you to establish connections. You get excellent resolution and accuracy, plus the convenience and ease of using a single pair of leads.

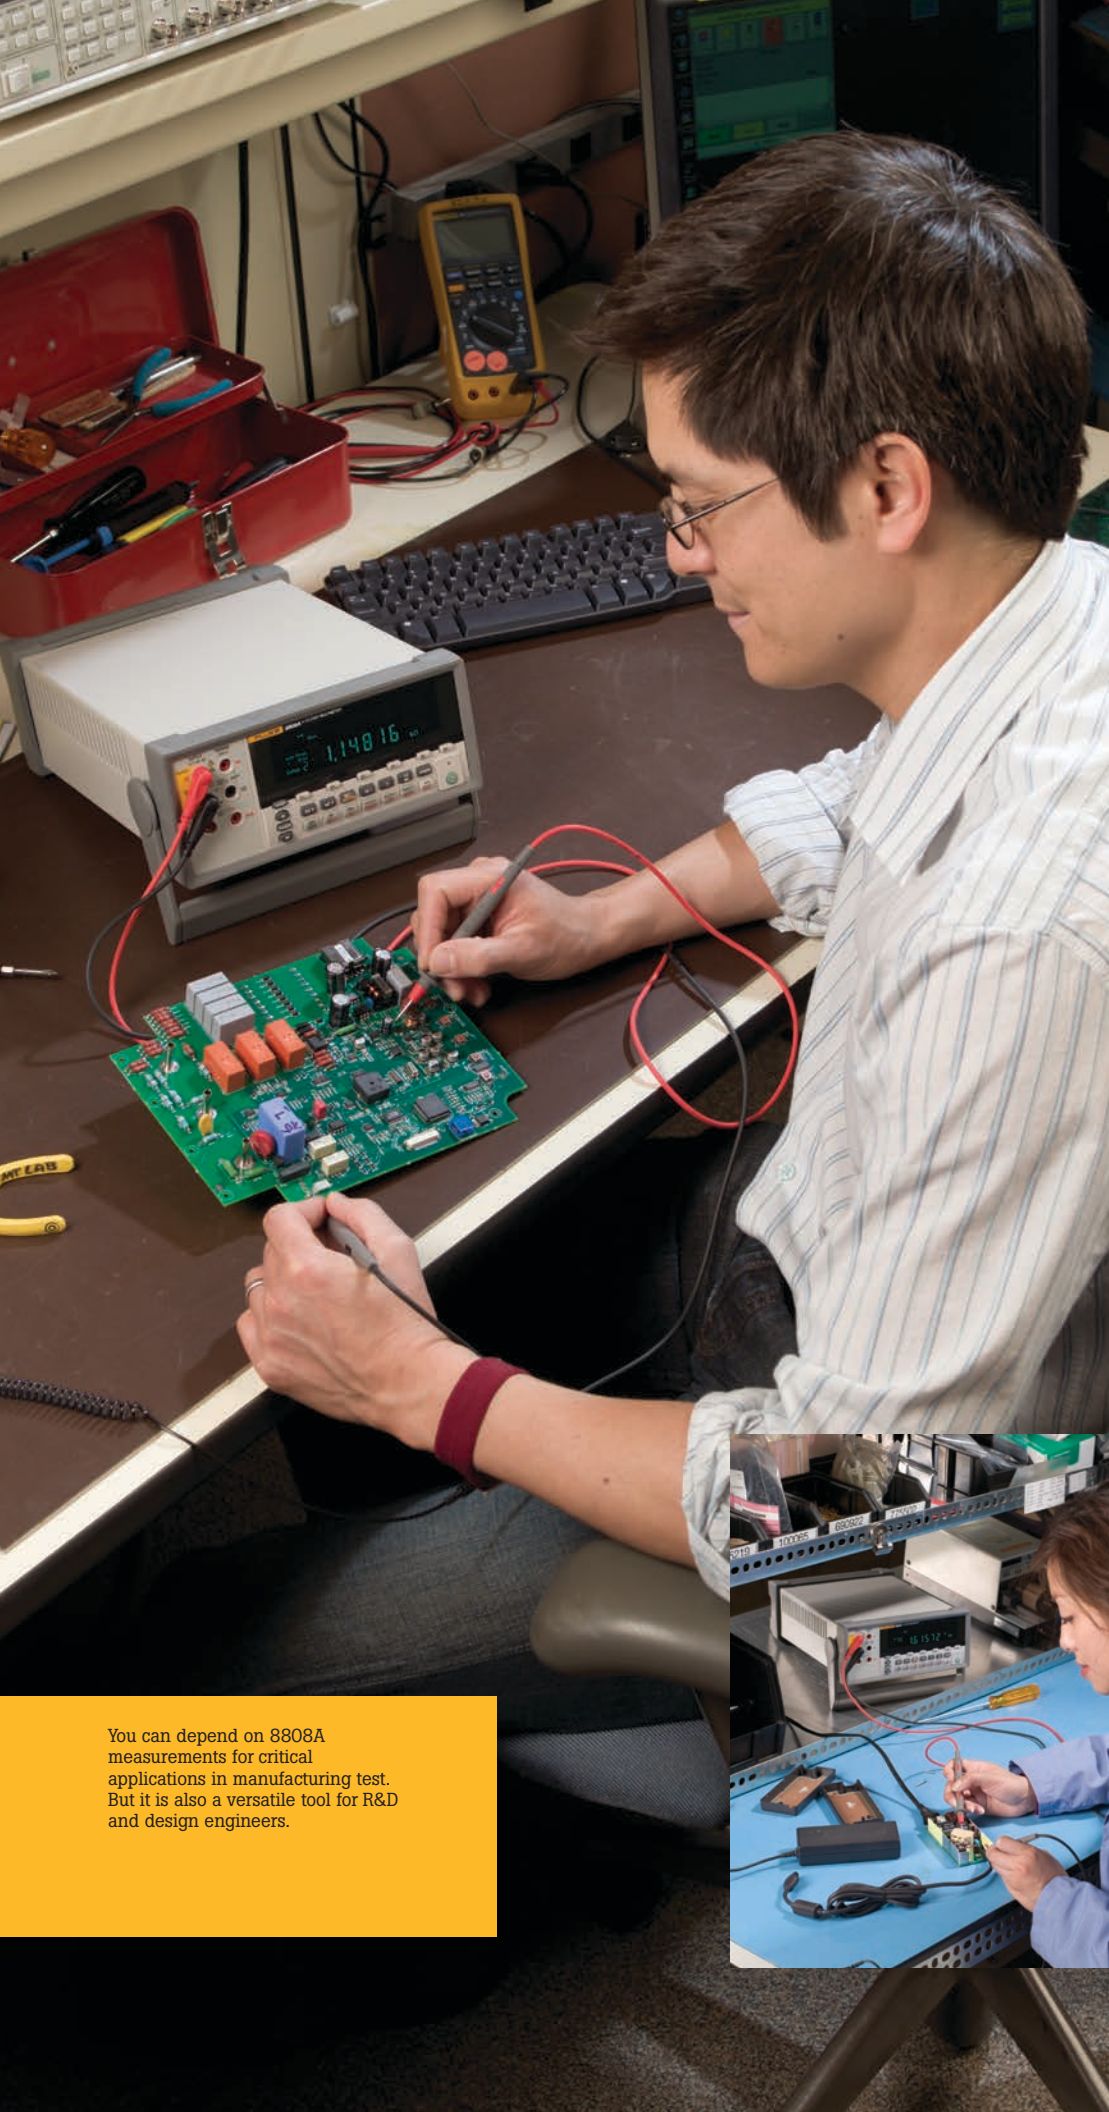

You can depend on 8808A measurements for critical applications in manufacturing test. But it is also a versatile tool for R&D and design engineers.

# Summary Specifications

FLUKE®

	8808A	8845A	8846A
Display	VFD multi segment display	VFD dot matrix	
Resolution	5.5 digits	6.5 digits	
<b>Measurement function</b>	<b>Accuracy, ± (% of reading + % of range)</b>		
V dc ranges	200 mV to 1000 V	100 mV to 1000 V	
Maximum resolution	1 uV	100 nV	
Accuracy	0.015 + 0.003	0.0035 + 0.0005	0.0024 + 0.0005
<b>V ac</b>			
Ranges	200 mV to 750 V	100 mV to 750 V	100 mV to 1000 V
Maximum resolution	1 uV	100 nV	
Accuracy	0.2 + 0.05	0.06 + 0.03	0.06 + 0.03
Frequency	20 Hz to 100 KHz	3 Hz to 300 KHz	
<b>Resistance</b>			
2x4 wire	Yes	Yes	Yes
Ranges	200 Ω to 100 MΩ	100 Ω to 100 MΩ	10 Ω to 1 GΩ
Maximum resolution	1 mΩ	100 μΩ	10 μΩ
Accuracy	0.02 + 0.003	0.010 + 0.001	0.010 + 0.001
<b>A dc</b>			
Ranges	200 μA to 10 A	100 μA to 10 A	100 μA to 10 A
Maximum resolution	1 nA	100 pA	100 pA
Accuracy	0.02 + 0.005	0.050 + 0.005	0.050 + 0.005
<b>A ac</b>			
Ranges	20 mA to 10 A	10 mA to 10 A	100 μA to 10 A
Maximum resolution	100 uA	10 μA	100 pA
Accuracy	0.3 + 0.06	0.10 + 0.04	0.10 + 0.04
Frequency	20 Hz to 2 kHz	3 Hz to 10 kHz	3 Hz to 10 kHz
<b>Freq/period</b>			
Ranges	20 Hz to 1 MHz (freq only)	3 Hz to 300 kHz	3 Hz to 1 MHz
Max. Resolution	0.1 mHz	1 μHz	1 μHz
Accuracy	0.01 %	0.01 %	0.01 %
<b>Continuity/Diode Test</b>	Yes		
<b>Capacitance</b>			
Ranges	—	—	1 nF to 0.1 F
Maximum resolution	—	—	1 pf
Accuracy	—	—	1 %
<b>Temperature</b>			
Type	—	—	Platinum RTD
Range	—	—	-200 °C to +600 °C
Maximum resolution	—	—	0.01 °
Accuracy	—	—	0.06 °
<b>Math functions</b>			
Types	—	Zero, Min/Max/Average, Std Dev; mx+b	
dB/dBm	Yes	Yes	
<b>Advanced functions</b>			
Statistics/histogram	No	Yes	
Trendplot	No	Yes	
Limit Test	Yes	Yes	
<b>Input output</b>			
USB memory	—	—	USB memory drive port
Real time clock	No	No	Yes
Interfaces	RS-232, USB with optional adapter	RS 232, IEE-488.2, Ethernet, USB with optional adaptor	
Programming Languages/modes	Simplified ASCII, Fluke 45	SCPI (IEEE-488.2), Agilent 34401A, Fluke 45	
<b>General</b>			
Weight	2.1 kg (4.6 lb)	3.6 kg (8.0 lb)	
Size (HxWxD)	88 mm x 217 mm x 297 mm (3.46 in x 8.56 in x 11.7 in)		
Safety	Designed to comply with EN 61010-1:2001, ANSI/ISA 61010-1 (S82.02.01):2004, UL 61010-1:2004, CAN/CSA C22.2 No. 61010.1:2004	Designed to comply with IEC 61010-1 2000-1, ANSI/ISA-S82.01-1994, CAN/CSA-C22.2 No. 1010.1-92 CAT I 1000 V, CAT II 600 V	
Warranty	Three-year		

## Ordering Information

### Models

**8845A** 6.5 digit precision multimeter, 35 ppm  
**8846A** 6.5 digit precision multimeter, 24 ppm USB mem  
**8808A** 5.5 digit multimeter, .01 %

### Options and accessories

#### 8808A/8845A/8846A

**TL910** Precision Electronic Probe Set  
**884X-SHORT** 4-Wire Short  
**TL2X4W-PT II** 2x4 Wire Ohms Test Lead  
 2 mm Probe Tip  
**884X-USB** USB to RS232 cable adapter  
**FVF-UG** FlukeView Forms Software Upgrade— No Cable  
**Y8846S** Rack Mount Kit, Single  
**Y8846D** Rack Mount Kit, Dual

#### 8845A/8846A

**884X-RTD** 100 Ohm RTD Temperature Probe  
**884X-512M** USB Memory 512 M  
**884X-1G** USB Memory 1 GB  
**Y8022** IEEE488 cable (2 m)

**Fluke. Keeping your world up and running.®**

#### Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

#### Fluke Europe B.V.

PO Box 1186, 5602 BD Eindhoven, The Netherlands

#### For more information call:

In the U.S.A. (800) 443-5853 or Fax (425) 446-5116  
 In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222  
 In Canada (800)-36-FLUKE or Fax (905) 890-6866  
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116  
 Web access: <http://www.fluke.com>

©2007-2014 Fluke Corporation.  
 Specifications subject to change without notice.  
 Printed in U.S.A. 7/2014 2814536C\_EN  
 Pub\_ID: 11262-eng Rev 03

Modification of this document is not permitted without written permission from Fluke Corporation.



# Services d'EURO-INDEX

EURO-INDEX est un fabricant, importateur et distributeur de diverses marques A dans le domaine des instruments de test et de mesure. Nous fournissons également une large gamme de services pour optimiser l'utilisation de ces instruments dans vos activités. Ces services comprennent naturellement l'entretien, la réparation et l'étalonnage des instruments, mais nous proposons aussi une assistance sous forme de formation via notre EURO-INDEX Academy et la location d'instruments.

## Centre de Service Agréé

EURO-INDEX est un Centre de Service Agréé pour toutes les marques représentées. Cela signifie que vos instruments sont pris en charge par des techniciens formés par le fabricant et disposant des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument, ainsi que les certifications (ATEX, EN50379, etc.) restent intactes.

## Laboratoire de maintenance et de calibrage

Le laboratoire des Pays-Bas est accrédité RvA selon la norme EN-ISO/IEC 17025. Cette accréditation est valable pour différentes grandeurs, telles que spécifiées dans le champ d'application associé au numéro d'accréditation K105. Les certificats de calibrage RvA sont acceptés à l'international et équivalents à ceux de BELAC.



## Service Mobile

Outre les laboratoires d'étalonnage fixes de Zaventem et de Capelle aan den IJssel, nous disposons également d'un laboratoire itinérant appelé "Service mobile". Nos services peuvent venir vers vous, en offrant une qualité équivalente.

## MQS®

MQS® est une formule d'entretien exclusive comportant un entretien et un calibrage périodiques de vos instruments de mesure à un coût fixe et faible. Via un portail Web gratuit ([monmq.be](http://monmq.be)), vous avez toujours accès à vos certificats de calibrage.

## Location d'instruments de mesure

- Vaste assortiment
- Précision démontrable par le certificat d'étalonnage actuel
- Conseils avisés
- Les instruments sont livrés avec leurs accessoires

## EURO-INDEX Academy

- Formations et séminaires
- Vidéos de démonstration et d'instruction
- Notes d'application



Comptoir de service



Entretien, réparation et calibrage



Formations et séminaires



Service Mobile

Sous réserve de modifications EURO-INDEX® FR 23001



BELGIQUE

Chaussée de Louvain 607  
1930 Zaventem  
T: 02 - 757 92 44  
F: 02 - 757 92 64  
[sales@euro-index.be](mailto:sales@euro-index.be)  
[www.euro-index.be](http://www.euro-index.be)

PAYS-BAS

Rivium 2e straat 12  
2909 LG Capelle a/d IJssel  
T: +31 - (0)10 - 2 888 000  
F: +31 - (0)10 - 2 888 010  
[verkoop@euro-index.nl](mailto:verkoop@euro-index.nl)  
[www.euro-index.nl](http://www.euro-index.nl)

