


METRISO 5024

Insulation and Resistance Measuring Instrument with Voltage Measuring Range

3-349-347-03
4/8.14

- Insulation resistance measurement: 0.1 ... 400 M Ω
- Low-resistance measurement: 0 ... 4 Ω
- Voltage measurement: 0 ... 500 V
- LED and beeper
 - as function control
 - for GO/NO GO decisions
- Scale illuminated by LED for insulation and low-resistance measurement
- Compact and rugged
For service calls under harsh conditions and laboratory use

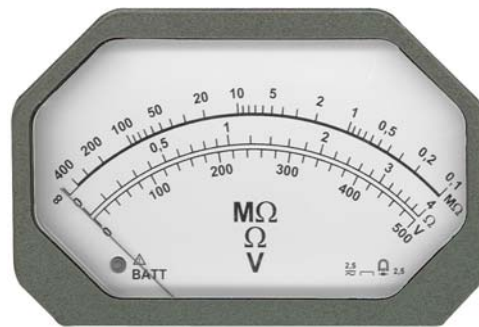

Features

Nominal Voltages: 100 V, 250 V and 500 V

The instrument is suitable for the measurement of insulation resistance at voltage-free devices and equipment with nominal voltages of up to 500 V.

Low-Resistance Measurement: 0 ... 4 Ω

Low-resistance measurement is performed in accordance with VDE 0413, part 4. It is used for testing resistance at ground cables, protective conductors and equipotential bonding conductors, including related connections and terminals.

Voltage Measurement to 500 V

The instrument is also equipped with a 500 V measuring range for direct and alternating voltages. This provides users with the advantage of checking devices under test for the absence of voltage, and discharging capacitive devices under test.

Minimal Battery Depletion

Measurement is only performed in the resistance measuring ranges when the M Ω or Ω key is pressed. Battery service life is maximized in this way.

Voltage measurement can be performed without using the battery.

Characteristic Values

Insulation Resistance Measurement, Measuring Voltages: 100/250/500 V

Measuring Range	Intrinsic Uncertainty	Overload	Measuring Current	Short-Circuit Current
0.1 ... 400 M Ω	2.5%	600 V AC	> 1 mA	< 10 mA

* Measuring error under reference conditions relative to scale length (l = 84.6 mm)

Low-Resistance Measurement, Measuring Voltage: 4.5 V

Measuring Range	Intrinsic Uncertainty	Overload	Measuring Current	
0 ... 4 Ω	2.5%	250 V DC	>200 mA	

* Measuring error under ref. conditions relative to upper range value (l = 74.9 mm)

Voltage Measurement, DC / AC (40 ... 200 Hz)

Measuring Range	Intrinsic Uncertainty	Overload	Internal Resistance
0 ... 500 V	2.5%	600 V AC	450 k Ω

* Measuring error under reference conditions relative to scale length (l = 73.3 mm)

Applicable Regulations and Standards

IEC 61010-1/EN 61010-1/ VDE 0411-1	Safety requirements for electrical equipment for measurement, control and laboratory use
IEC 61557 EN 61557 VDE 0413	Part 1: General requirements Part 2: Insulation resistance measuring instruments Part 4: Instruments for measuring resistance at ground cables, protective conductors and equipotential bonding conductors
EN 60529 VDE 0470, Part 1	Test instruments and test procedures Protection provided by enclosures (IP code)
IEC 61326/EN 61326	Electromagnetic compatibility (EMC)

METRISO 5024

Insulation and Resistance Measuring Instrument with Voltage Measuring Range

Reference Conditions

Normal position of use	horizontal
Ambient temperature	+23 °C ±2 K
Relative humidity	40 ... 60%
Measured quantity frequency	45 ... 65 Hz (during voltage measurement)
Line voltage waveshape	sinusoidal (RMS value)
Battery voltage	5.5 V ±0.5 V

Influence Error under Nominal Conditions of Use

Total error caused by battery, temperature and normal position of use = 10%

Nominal Conditions of Use

Temperature	0 ... 40 °C
Normal position of use	any
Battery voltage	4.4 ... 6.5 V

Ambient Conditions

Storage temperature	-25 °C ... + 60 °C (without batteries)
Relative humidity	max. 75%, no condensation allowed
Elevation	to 2000 m

Power Supply

Batteries	4 ea. 1.5 V mignon-cell per IEC LR6 (size AA)
Working range	4.4 ... 6.5 V
Battery test	by means of LED

Electrical Safety

Safety class	II
Test voltage	3.7 kV
Measuring category	II / 600 V
Fouling factor	2
Fuse	F0.25A/500V, 6.3x32

EMC

	EN 61326
Interference emission	EN 55022 class B
Interference immunity	EN 61000 -4-2 power feature A -4-3 power feature B

Mechanical Design

Protection	IP 40 per DIN VDE 0470 part 1/EN 60529
Dimensions	98 mm x 310 mm x 40 mm
Weight	approx. 0.5 kg with batteries

Standard Equipment

- 1 insulation and resistance measuring instrument
- 1 carrying pouch
- 1 replacement fuse
- 1 operating instructions

Accessories

KS24 cable set

4 m single strand extension cable with permanently connected test probe and a contact-protected socket on the other end, as well as one alligator clip which can be plugged onto the test probe.

ISO calibrator 1



Calibration adapter for testing the accuracy of instruments used for measuring insulation resistance and low-resistance (per VDE 0413, parts 1, 2 and 4).

Order Information

Description	Type	Article Number
Insulation and resistance measuring instrument with carrying pouch	METRISO 5024	M540E
Cable set for insulation measuring instruments	KS24	GTZ3201000R0001
Calibration adapter	ISO calibrator	M662A

Edited in Germany • Subject to change without notice • A pdf version is available on the internet

 GOSSEN METRAWATT

GMC-I Messtechnik GmbH
Südwestpark 15
90449 Nürnberg • Germany

Phone +49 911 8602-111
Fax +49 911 8602-777
E-Mail info@gossenmetrawatt.com
www.gossenmetrawatt.com

Service van EURO-INDEX

EURO-INDEX verleent service op alle meetinstrumenten uit haar leveringspakket en biedt de faciliteiten, kennis en hoog gekwalificeerd personeel voor (preventief) onderhoud, reparatie en kalibratie van uw meetinstrumenten.

Geautoriseerd Service Centrum

EURO-INDEX is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum.

Dit betekent dat uw instrumenten worden behandeld door goed opgeleid en kundig personeel, dat beschikt over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen gebruikt en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Service- en kalibratielaboratorium

EURO-INDEX beschikt over een bijzonder modern service- en kalibratielaboratorium met RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor verschillende grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



KWS®

KWS is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie. Veel zaken worden voor u geregeld, zodat u zonder zorgen gebruik kunt maken van uw meetinstrumenten. De kosten zijn laag en voorspelbaar.

Digitale toegang tot uw kalibratiecertificaten met Mijn KWS

Via het Mijn KWS webportal heeft u altijd en overal toegang tot uw kalibratiecertificaten en gerelateerde documenten.

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Deskundig advies
- Instrumenten worden geleverd met accessoirepakket en herleidbaar kalibratiecertificaat

EURO-INDEX Academy

- Producttrainingen (individueel en klassikaal)
- Seminars
- Demonstratie- en instructievideo's

Bekijk de video op ons YouTube kanaal en ontdek alles over KWS



Servicebalie



Kalibratie rookgasanalyse



Seminars en workshops



Kalibratie thermografie

Wijzigingen voorbehouden EURO-INDEX® VL 18001

Het Bluetooth® woord- en beeldmerk zijn eigendom van Bluetooth SIG, Inc. Gebruik van deze merken door EURO-INDEX geschiedt onder licentie.



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
info@euro-index.be
www.euro-index.be

NEDERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

