

## DLRO100 Series Megger digital low resistance ohmmeters



- CAT IV 600 V AC / 500 V DC for safe operation
- Lightweight 100 A battery powered unit for portability
- High noise immunity for stable readings
- Smooth DC Output for circuit breaker testing
- IP54 for protection against dust and moisture whilst testing
- Save, download and delete results (100XB/HB variants)
- Remote operation, Bluetooth® & asset/result tagging (100HB variants)

### DESCRIPTION


A significant addition to the comprehensive range of Megger Low Resistance Ohmmeters, DLRO100 enables low resistance measurement, across multiple applications, in areas without access to mains power. The integral Li-Ion battery supplies a constant 100 A current for up to 200 Manual/Auto tests to enable enhanced productivity in remote locations. With a focus on user safety, advanced design features ensure the safe operation of the instrument in the most adverse conditions, including a CAT IV 600 VAC / 500 VDC safety rating in accordance with IEC61010. The rugged design, intuitive interface and IP54 (lid open) rating ensure reliability and ease of use in the most arduous of conditions.

### Test Modes

The **Manual test** mode allows the user to initiate the test procedure once the probes are in contact with the object under test. Once the TEST button is depressed the TEST lamp will illuminate and the instrument will undertake a single test to verify the resistance of the test object.

In **Auto mode** the user selects the desired current, connects the current test leads and as soon as the potential leads are connected a test will start automatically. To repeat a test, simply break contact with the potential probes and remake contact.

In **Continuous mode** the user connects the test leads and presses the TEST button, initiating the test procedure. The instrument will continue to test, updating the display after each new test cycle, until the TEST button is pressed or the test procedure times out.

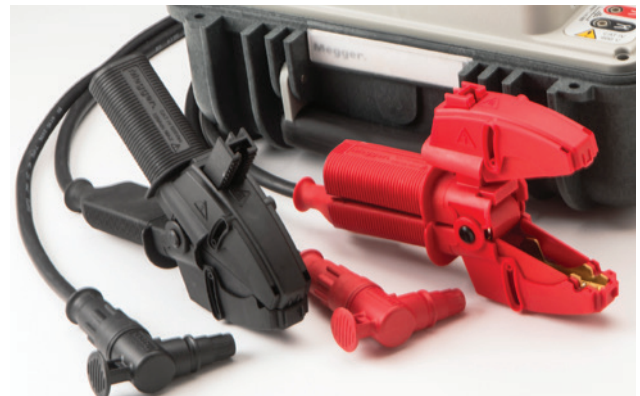

A new tough adjustable clamp has been designed to ensure flexibility in many applications and provides a good connection with the test piece.

### Test Leads:

Standard test leads, with separate Current & Potential, or Kelvin, combining both Current & Potential in one clamp, are available as optional accessories in 5 m, 10 m & 15 m lengths. All test leads are CAT IV 600 V AC / 500 V DC safety rated.

## DLRO100 Series

# Megger digital low resistance ohmmeters

### History of 'Ducter' testing

For over 100 years the 'Ducter test' has been used to describe a simple test for measuring very low contact resistances and "Ducter", which is still used as a trade mark, was the name originally given to the low resistance ohmmeter manufactured by Megger. The name Ducter was registered by Megger in June 1908 and 'Ducter' has since become the industry standard.

### APPLICATION

The need for accurate low resistance measurement is well known and very diverse. Typical applications include:

#### Utilities & Service Contractors – commissioning new installations & regular maintenance testing of

- Switchgear and circuit breaker contact resistance
- Busbar and cable joints
- Wire and cable resistance
- Lightning conductor bonding

#### Original Equipment Manufacturer – detecting manufacturing defects

- Production test of circuit breakers – contacts & joints
- Production test of high voltage switchgear
- Production test of welded joints & connections

#### Transport – manufacturing & maintenance

- Railway rolling stock ground connections & manufactured joints
- Railway lines & conductor rails – commissioning & maintenance
- Aircraft frame bonds and static control circuits

SPECIFICATIONS		
Measurement range	0.1 $\mu\Omega$ – 1.999 $\Omega$	
Resolution	0.1 $\mu\Omega$	
Noise rejection	Differential 100 mV @ 50-60 Hz on Test Leads	
DC output	Smooth DC	
IP rating	IP54 Lid open / IP65 Lid closed	
Operating temperature range	-20°C up to 50°C	
Storage temperature range	-30°C up to 70°C	
Humidity	<85% R.H. non-condensing	
Battery life	200 single 100 A tests or up to 2x 10 minutes continuous 100 A output	
Battery type	User replaceable Li-ion battery pack	
Battery charge time	Full charge in 2.5 Hrs from flat	
Maximum output voltage	2 V (battery), 3 V (AC)	
EMC	IEC61326-1	
Safety	IEC61010 CAT IV 600 VAC / 500 VDC up to 2000 m CAT IV 300 V up to 4000 m	
Dimensions	400 x 300 x 200 mm	
Weight	7.0 kg (AC Only) 7.9 kg (with Battery)	
<b>Accuracy</b>		
<b>Current setting</b>	<b>Resistance range</b>	<b>Accuracy</b>
50 – 110 A	0 – 100.00 m $\Omega$	Typical $\pm$ (0.2% + 0.2 $\mu\Omega$ ) Max. $\pm$ (0.2% + 0.8 $\mu\Omega$ )*
11 – 49 A	10 $\mu\Omega$ – 100.00 m $\Omega$	Typical $\pm$ (0.2% + 0.5 $\mu\Omega$ ) Max. $\pm$ (0.2% + 2.0 $\mu\Omega$ )*
10 A	10 $\mu\Omega$ – 1000.0 m $\Omega$	Typical $\pm$ (0.2% + 1.0 $\mu\Omega$ ) Max. $\pm$ (0.2% + 2.5 $\mu\Omega$ )*
Added operational uncertainty for harsh environmental conditions (85% RH, -20 °C to +50 °C):		
<b>Current setting#</b>	<b>Resistance range</b>	<b>Accuracy</b>
50 – 110 A	0 – 100.00 m $\Omega$	$\pm$ (0.0% + 0.0 $\mu\Omega$ )
11 – 49 A	10 $\mu\Omega$ – 100.00 m $\Omega$	$\pm$ (0.0% + 1.0 $\mu\Omega$ )
10 A	10 $\Omega$ – 1000.0 m $\Omega$	$\pm$ (0.1% + 2.0 $\mu\Omega$ )
# Actual test current may be limited by maximum output voltage		
* $k = \pm 4\sigma$		
The Bluetooth ® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc and is used under licence.		

## DLRO100 Series

### Megger digital low resistance ohmmeters

FEATURES AND BENEFITS				
	DLRO100			
FEATURES	EB	XB	HB	BENEFITS
CAT IV 600 V AC / 500 V DC up to 2000 m CAT IV 300 V up to 4000 m	■	■	■	On all test terminals for safe operation
Lightweight 100 A battery powered unit	■	■	■	Easily portable – 7.9 Kg (17 lbs) with battery
High noise immunity	■	■	■	For stable readings in noisy environments
Smooth DC Output	■	■	■	Circuit breaker testing
IP54 Lid open IP65 Lid closed	■	■	■	For protection against ingress during operation (lid open) and storage (lid closed)
Li-ion battery	■	■	■	Always ready to test with a Li-ion fast charge battery – 2.5 hours charge time from fully discharged Works from an AC supply if the battery is fully discharged Battery capacity – 200 single tests or up to 2x 10 minutes continuous 100 A output for extended use
100A Manual, Auto and Continuous test	■	■	■	Quick selection of test modes for different applications with 4 terminal measurement for flexibility
Custom test	■	■	■	Adjustable current 10 – 110 A, ramp rates configurable from 0.5s upto 30s and configurable test duration for flexibility
Range and test mode rotary switches	■	■	■	Quick and easy selection of current ranges and test modes
Ultra tough outer case construction	■	■	■	Designed for use in demanding environments with a flame retardant UL94 V0 inner case for safety
Dual Ground™		■*	■*	Using the optional DC clamp enables circuit breaker testing with ground protection in place for safety
Large, clear LCD	■	■	■	Ideal for all light conditions, with backlight
Internal memory storage with USB download capability		■	■	For effective results management, up to 220 time and date stamped records
Remote Control			■	Control the instrument remotely over USB via a PC or laptop for added safety
Asset tagging			■	Running a PowerDB app on Windows tablet or smart phone to populate unique asset IDs for efficient asset management
Bluetooth®			■	For effective wireless communication. For download and asset tagging
* with optional Clamp				
All models. Two year warranty – second year conditional on free product registration.				

## DLRO100 Series Megger digital low resistance ohmmeters

Display clearly showing large digits for test results and visible in all light conditions

Single button to save test results and to automatically save in auto mode

IP54 for protection against dust and rain during testing

Clearly visible C and P LED's showing continuity of current and potential connections

Back light – for low light conditions

USB & Bluetooth for communications

Rotary switch selection of test modes and off position

Simple navigation of setup and stored results

Rotary switch selection of view, download and delete test results

User configurable custom test.  
Adjustable :  
■ current ramp  
■ duration of test  
■ output current

Quick and easy rotary switch selection of 10 A, 50 A, 100 A tests – no configuration required



Smooth DC Output on C1 and C2 terminals


High noise immunity on P1 and P2 terminals

CAT IV 600 V AC / 500 DV safety rating on all terminals

DualGround™ capability with the DC clamp



A new terminal adapter has been designed to enable the use of users own test leads.

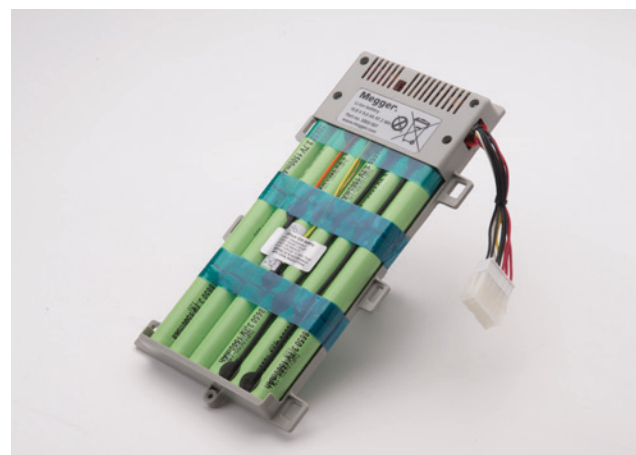

A user replaceable high power lightweight Li-ion battery provides, from a single charge, 200 Manual/Auto 100 A tests or up to two 10 minutes continuous 100 A tests and takes 2.5 hours to charge when fully discharged.

## DLRO100 Series

### Megger digital low resistance ohmmeters

#### ORDERING INFORMATION

Description	Order Code	Description	Order Code
<b>DLRO100EB:</b>		<b>Optional Accessories</b>	
DLRO100EB (UK Plug)	1004-872	DLRO100 CAT IV 600 V Lead Set (5m)	1004-448
DLRO100EB (SCHUKO)	1004-874	DLRO100 CAT IV 600 V Lead Set (10m)	1004-449
DLRO100EB (US Plug)	1004-879	DLRO100 CAT IV 600 V Lead Set (15m)	1004-450
<b>DLRO100XB:</b>		DLRO100 Terminal Adaptors (x2)	1005-555
DLRO100XB (UK Plug)	1004-913	DLRO100 Lead Set Adaptors (10 A Leads)	1008-604
DLRO100XB (SCHUKO)	1004-914	DLRO100 CAT IV 600 V Kelvin Lead Set (5m)	1005-634
DLRO100XB (US Plug)	1004-919	DLRO100 CAT IV 600 V Kelvin Lead Set (10m)	1005-635
<b>DLRO100HB:</b>		DLRO100 CAT IV 600 V Kelvin Lead Set (15m)	1005-636
DLRO100HB (UK Plug)	1004-953	DLRO100 DC Clamp (MCPD 100L)	1005-622
DLRO100HB (SCHUKO)	1004-954	DLRO100 ISO17025 (UKAS) Calibration Certificate	1005-888
DLRO100HB (US Plug)	1004-959	DLRO100 Lithium Ion Battery Pack	1005-973
<b>Included Items</b>		USB Cable (XB, HB variants only)	1004-610
Certificate of Test		Mains lead (10A)/EU SCHUKO	1013-389
Quick Start Guide		Mains lead IEC320/US	1008-016
Calibration Certificate		Mains lead IEC320/UK	1008-017
Mains lead			
Lithium Ion Battery Pack			
USB Cable (XB, HB variants only)			
<b>Lead set is NOT included with the instrument and must be ordered as an optional accessory.</b>			

#### SALES OFFICE

Megger Limited  
Archcliffe Road Dover  
CT17 9EN England  
T. +44 (0) 1304 502101  
E. UKsales@megger.com

#### DLRO100\_DS\_en\_V10

www.megger.com  
ISO 9001  
The word 'Megger' is a registered trademark

**Megger**<sup>®</sup>

# Les services d'EURO-INDEX

EURO-INDEX fournit des services pour tous les instruments de sa gamme de fournitures et offre des services, de la connaissance et du personnel hautement qualifié pour l'entretien (préventif), la réparation et le calibrage de vos instruments de mesure.

## Centre de Service Agréé.....

EURO-INDEX est un Centre de Service Agréé pour toutes les marques représentées.

Autrement dit, vos instruments sont traités par du personnel formé et compétent, qui dispose des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument ainsi que la certification (ATEX, EN50379, etc.) restent valables.

## Laboratoire de maintenance et de calibrage .....

EURO-INDEX dispose d'un laboratoire de maintenance et de calibrage particulièrement moderne, titulaire d'une accréditation conforme à la norme NEN-EN-ISO/IEC 17025. Cette accréditation est valable pour différentes grandeurs, telles que spécifiées dans le champ d'application associé au numéro d'accréditation K105.



## MQS® .....

MQS est une formule d'entretien exclusive comportant un entretien et un calibrage périodiques de vos instruments de mesure. La prise en charge de multiples aspects vise à vous libérer de tout souci lors de l'utilisation de vos instruments de mesure. Les coûts sont modiques et prévisibles.

## Accès numérique à vos certificats de calibrage avec Mon MQS .....

Mon MQS est un portail Web qui vous donne accès partout et à tout moment à vos certificats de calibrage et aux documents apparentés.

## Location d'instruments de mesure .....

- Vaste assortiment
- Conseils avisés
- Les instruments sont livrés avec leurs accessoires et leurs certificats de calibrage traçables

## EURO-INDEX Academy .....

- Formations sur les produits (individuelles et collectives)
- Séminaires
- Vidéos de démonstration et d'instruction

**Visionnez la vidéo sur notre chaîne YouTube et découvrez tout ce qu'il vous faut savoir sur MQS**



Guichet des services



Calibrage de l'analyse de gaz de combustion



Séminaires et ateliers



Calibrage de la thermographie

Sous réserve de modifications EURO-INDEX® FR 18001

Le nom et la marque Bluetooth® sont la propriété de Bluetooth SIG Inc. L'utilisation de ce nom par EURO-INDEX s'effectue sous licence.



**BELGIQUE**  
Leuvensesteenweg 607  
1930 Zaventem  
T: 02 - 757 92 44  
F: 02 - 757 92 64  
info@euro-index.be  
www.euro-index.be

**PAYS-BAS**  
Rivium 2e straat 12  
2909 LG Capelle a/d IJssel  
T: +31 - (0)10 - 2 888 000  
F: +31 - (0)10 - 2 888 010  
verkoop@euro-index.nl  
www.euro-index.nl



Portée accréditée  
voir www.rva.nl