

MCC1010 and MVC1010

1000 A AC Current Clamp



- **CAT IV 600 V current measurement to 1000 A AC**
- **1 mA/1 A sensitivity with rated burden of 1 Ω**
- **Large jaws for cables up to 52 mm**
- **Overvoltage protection of the output terminals**
- **Suitable for leakage currents**

DESCRIPTION

The current probe is designed for measurements of AC currents up to 1000 A with a 1000:1 step-down ratio. The probe offers excellent accuracy (0.3% error at full range) and small phase shift (0.7° at full range) so it can be used for metering of power, energy and power quality applications. Such high performance is achieved because the magnetic cores are made from high-permeability FeNi alloy.

The rated terminating resistance (burden) of 1 Ω must be provided by the instrument connecting to MCC1010 and MVC1010. The output terminals are protected with a voltage limiting circuit ensuring a safe-to-touch voltage under all rated conditions.

MCC1010 and MVC1010 are rated to CATIV 600 V, according to the international standard IEC 61010.

APPLICATIONS

The MCC1010 and MVC1010 are non contact current sensing clamps which is simple to use and has application with the following instruments:

- Power quality analysers
- Oscilloscopes
- Motor testers
- Clamp enabled earth testers
- Attached Rod Technique (ART)
- Stakeless testing
- Data loggers
- Digital multimeters

CLAMP USAGE

The MCC1010 and MVC1010 are intended to clamp around a single phase of the asset to be tested and not phase + neutral because this would yield an incorrect result as a consequence of current flowing in opposite directions. Keep the clamps separate wherever possible, to improve quality of multiphase current measurements.

An ammeter measuring up to 1 A can be connected directly to the MCC1010 or MVC1010. A current of 1000 A will result in the ammeter reading 1 A (1000:1 step down ratio).

The MCC1010 and MVC1010 generates 1 mV output signal across 1 Ω burden resistance for every 1 A of primary current, so if using a multimeter, one with a mV AC range is required. Dedicated earth tester instruments like Megger's DET range, DET3TC, DET4TC and DET4TCR will need to ensure the input resistance and measurement circuitry are appropriate for the 1 mV – 1 V input range and a primary current limit of 20 A.

If using a TRMS multimeter the voltage reading will be TRMS because of the accuracy and crest factor performance of the MCC1010 and MVC1010 clamps.

Both clamps must be used when completing resistance measurements. The MCC1010, induces a current through a conductor. The MVC1010, measures the voltage drop across the conductor. This way, non-contact resistance measurements can be undertaken using the MCC1010 and the MVC1010 clamps.

MCC1010 and MVC1010
1000 A AC CURRENT CLAMPS

ELECTRICAL SPECIFICATIONS

Step-down current ratio 1000:1

Sensitivity 1 mA/A

Amplitude and phase accuracy of the output signal

Primary current *	Accuracy of output signal	Phase shift of output signal
1 mA – 100 mA	≤1% + 5 μA	not specified
0.1 A – 1 A		≤0.7°
1 A – 10 A		
10 A – 100 A		
100 A – 1000 A	≤0.3%	

* Unless otherwise specified, reference conditions are: 22 ±3°C, 50% humidity, sinusoidal current at 50/60 Hz, no DC offset, centred conductor, external magnetic field <40 A/m, load impedance (burden) ≤1 Ω.

Maximum continuous current 1000 A at ≤500 Hz
100 A at >500 Hz

Frequency bandwidth 15 Hz – 10 kHz

Crest factor ≥6 for current up to 2000 A peak (300 A rms)

Influence of crest factor ≤1% for CF≤4

Nominal load impedance ≤1 Ω (burden resistance)

Maximum output voltage ≤28 V peak (electronic limiter)

Influence of frequency 30 Hz – 5 kHz ≤0.25%

Influence of conductor position in the jaws ≤0.3% of amplitude

Load influence up to 5Ω amplitude within specification up to 900 A
≤0.25% of amplitude above 900 A
≤0.1° on phase

Influence of DC offset ≤2% up to 20 A DC

Working voltage ≤600 V rms

ENVIRONMENTAL

Operating temperature -20 °C to +50 °C, <85% RH
-4 °F to +122 °F, <85% RH
(excluding ice or dirt in the jaws)

Storage temperature -40 °C to +70 °C, <85% RH
-40 °F to +158 °F, <85% RH

Influence of temperature ≤0.1% on amplitude
phase within specification

Influence of humidity amplitude and phase within specification (excludes ice or dirt on the jaws)

Max. conductor diameter 52 mm

GENERAL SPECIFICATIONS

Casing protection IP40 with jaws closed

Operating altitude 2000 m

Output terminals 4 mm shrouded sockets

Electrical safety IEC 61010-1:2010 +
IEC 61010-2-030:2010 +
IEC61010-2-032:2002

EMC IEC61326-1

Safety CATIV 600 V Pollution degree 2

Weight 700g

Dimensions 45 mm x 110 mm x 218 mm

ORDERING INFORMATION

Item (Qty)	Cat. No.
MCC1010	1010-516
MVC1010	1010-518

SALES OFFICE

Megger Limited
Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
E UKsales@megger.com

MCC1010--MVC1010_DS_en_V01

www.megger.com
ISO 9001
The word 'Megger' is a registered trademark

Megger[®]

Services d'EURO-INDEX


EURO-INDEX est le fabricant de la gamme LIGNE BLEUE et l'importateur/distributeur de diverses marques A d'instruments de test et de mesure. Nous proposons également un large éventail de services visant à optimiser l'utilisation de ces instruments dans le cadre de vos activités. Cela comprend la maintenance, la réparation et l'étalonnage des instruments, mais aussi le partage de connaissances via l'EURO-INDEX Academy et la location d'instruments.

Centre de Service Agréé

EURO-INDEX est un Centre de Service Agréé pour la plupart des marques de sa gamme. Cela signifie que vos instruments sont pris en charge par des techniciens formés par le fabricant et disposant des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument, ainsi que les certifications (ATEX, EN50379, etc.) restent intactes.

Laboratoire d'étalonnage

Notre laboratoire de service et d'étalonnage est accrédité BELAC conformément à la norme EN-ISO/IEC 17025. L'accréditation s'applique aux grandeurs et aux plages de mesure mentionnées dans l'annexe certifiée portant le numéro de certificat [760-CAL](#).

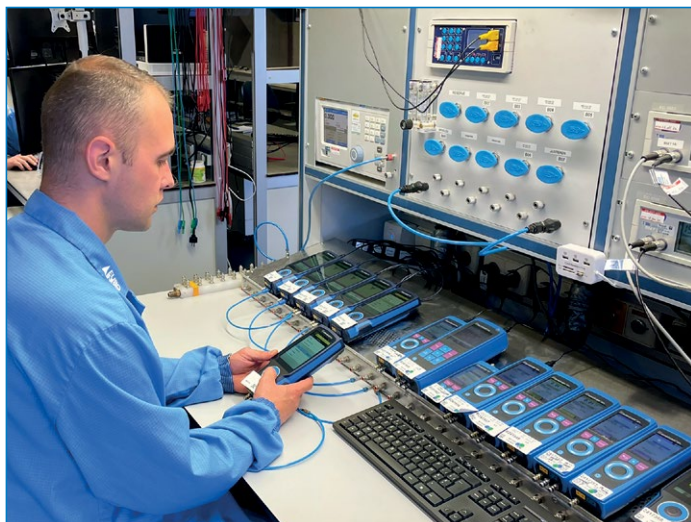

MQS®

MQS® est une formule d'étalonnage pour vos instruments de test et de mesure, comprenant un entretien et un étalonnage périodiques à un coût fixe et avantageux. Vos certificats d'étalonnage sont disponibles au format numérique via Mon MQS (portail web et application gratuits) et en scannant le code QR sur l'autocollant d'étalonnage de l'instrument.

Location d'instruments de mesure

Il existe plusieurs situations dans lesquelles la location est pratique :

- Vous avez temporairement besoin d'appareils supplémentaires.
- Votre propre instrument de mesure est en cours d'entretien et/ou d'étalonnage.
- Vous devez effectuer une mesure occasionnelle.

EURO-INDEX Academy

- Formations, sessions d'informations et workshops
- Vidéos de démonstration et d'instruction
- Notes d'application



Comptoir de service



Entretien, réparation et calibrage



Formations et séminars



Laboratoire d'étalonnage

Sous réserve de modifications EURO-INDEX® FR 26001



BELGIQUE
Chaussée de Louvain 607
1930 Zaventem
T: 02 - 757 92 44

sales@euro-index.be
www.euro-index.be

PAYS-BAS
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000

verkoop@euro-index.nl
www.euro-index.nl

