



BM 25A & BM 25A Wireless

Transportable Gas Detection



Presentation

The BM 25A packs the benefits of a fixed system area monitor into a rugged, user-friendly and transportable instrument.

It was designed to detect one to five gases for mobile or temporary work applications, team protection, area surveillance, or places where fixed detection systems are not suitable.

- Detect up to 5 gases simultaneously
- 103 dB at 3 feet audible alarm
- Ultra-bright flashing signal at 360°
- Run time of 170 hours
- Resistant to harsh environment
- Easily transportable - less than 15 lbS
- 30 devices per network
- 16 independent networks
- More than 0.5 mile RF line of sight
- Data acquisition to a controller



BM 25A & BM 25A Wireless


Transportable Gas Detection

Available as an option, the radio communication allows several BM 25A devices to communicate on the same network or to send information wirelessly to a controller.

A scalable network


Adding a BM 25A on an existing network has never been so easy as you just need to turn it on. The BM 25A is automatically added on the network

- Up to 30 BM 25A can be meshed on the same network
- Up to 16 networks can coexist with no interference

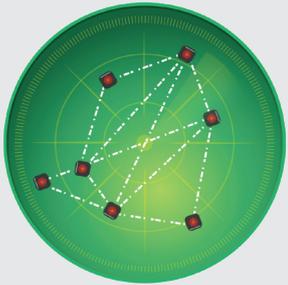


Alarm Transfer

If a BM 25A goes into gas alarm, all BM25s in the network will report a corresponding alarm.

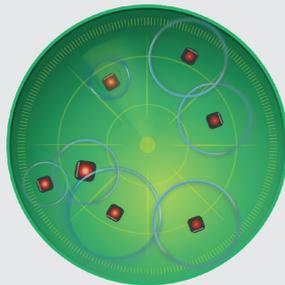


Safety Function Remains

If a BM 25A does not respond or if the network is split, then it is possible to continue to work by the time of the restoration of the network. The gas detection remains effective and each BM 25A would still locally alarm in the presence of gas.

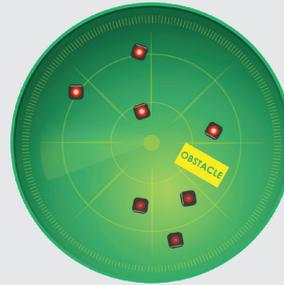

Network Self-Healing

When the obstacle is gone, the communication resumes automatically. The two groups merge together to form only one group again.

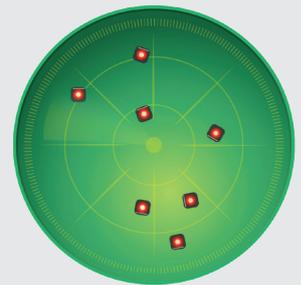

How does the MESH network, work?

Hosts are connected peer-to-peer manner, forming a net-like structure

- No central hierarchy
- Each node can receive, send and relay data
- If a node is down, it goes through another route
- Maximum distance between two communicating devices is 0.6 mile line of sight

Benefits of Mesh Topology:


- Fast and simple deployment
- High coverage versatility
- High fault tolerance
- Significantly reduces installation and network operating costs

Alarm & Datalogging Capabilities:

- 360° flashing signal
- 103 dB at 3 feet audible alarm.
- STEL and TWA values are available
- Datalogging capacity of more than four months (for 5 gases configuration).

Batteries


- Provide up to 170 hours of continuous runtime
- Full recharge in only 4 1/2 hours
- Safe trickle charger for long-term monitoring in classified zones.

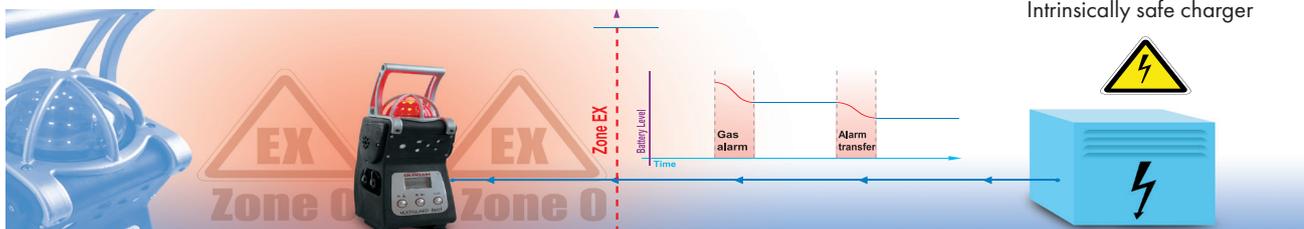

Trickle charge for long term area monitoring

Smartwireless HMI

BM 25As send fault status, alarm status and gas measurements to the controller. As soon as one BM 25A fires an alarm, the controller relays the information to all BM 25As on the same network that then turn in Alarm Transfer mode.

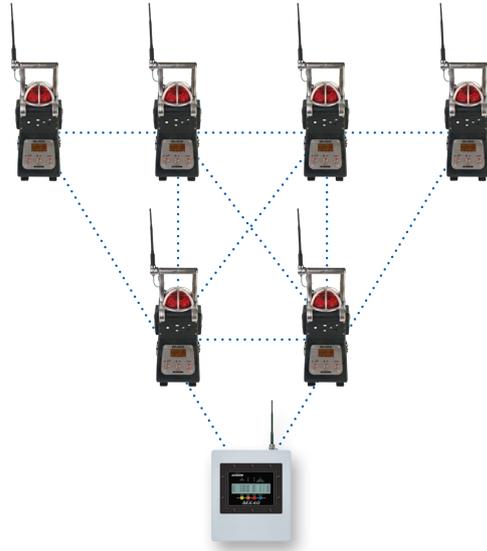

MX40 Controller

The SmartWireless® MX 40 Controller provides operator interface to the network and real time status display of all network devices. Flexible and expandable, a MX 40 network consists of any combination of (up to 16) BM 25A wireless and/or (up to 32) wireless and/or wired sensors, one or more control panels, and alarm warning devices. Command functions include alarm reset, alarm acknowledge, alarm test and radio silence. The control panel displays real time gas concentrations, field device status, battery levels, network RF signal quality and fault diagnostic conditions. Display indications include alarm status, channel, gas reading, battery life & link signal strength. Standard features include removable SD card with datalogging.

The Model MX 40 also allows for expanded use of Oldham addressable I/O modules that include a 4-channel 4-20mA input module (DA-4), a 4-alarm relay output module (RL-4), a 4-channel 4-20mA output module (AO-4), and a 4-relay contact input module (DI-4). Oldham modules can be mounted within the main system enclosure or installed remotely to simplify field wiring.

BM 25A & BM 25A Wireless

Transportable Gas Detection

Technical specification		certifications	
Instrument Warranty::	Two-year warranty, excluding consumables (sensors, filters, etc.)		
Case Material:	IP66 - Impact resistant polycarbonate		
Dimensions:	470 x 180 x 190 mm (16.7" x 7.1" x 7.5")		
Weight:	6.8 kg (15 lbs)		
Display:	Graphic liquid crystal display with backlight		
Sensors:	Combustible Gas – Catalytic Diffusion Methane, Propane, Butane, Isobutane, LPG, Ethanol, Pentane – Infrared Oxygen and Toxic Gases – Electrochemical CO2 – Infrared Isobutylene – PID		
Measuring ranges:	Combustible Gases:	0-100% LEL in 1% increments	
	Methane:	0-100% LEL in 1% increments – Infrared	
	Methane:	0-100% of volume in 1% increments – Infrared	
	Propane:	0-100% LEL in 1% increments – Infrared	
	Butane:	0-100% LEL in 1% increments – Infrared	
	Isobutane:	0-100% LEL in 1% increments – Infrared	
	LPG:	0-100% LEL in 1% increments – Infrared	
	Ethanol:	0-100% LEL in 1% increments – Infrared	
	Pentane:	0-100% LEL in 1% increments – Infrared	
	Oxygen:	0-30% Volume in 0.1% increments	
	Carbon Monoxide:	0-100 ppm in 1 ppm increments	
	Carbon Monoxide:	0-1000 ppm in 1 ppm increments	
	Hydrogen Sulfide:	0-100 ppm in 1 ppm increments	
	Hydrogen:	0-2000 ppm in 1 ppm increments	
	Sulfur Dioxide:	0-30 ppm in 0.1 ppm increments	
	Chlorine:	0-10 ppm in 0.1 ppm increments	
	Nitrogen Dioxide:	0-30 ppm in 0.1 ppm increments	
	Nitric Oxide:	0-300 ppm in 1 ppm increments	
	Hydrogen Chloride:	0-30 ppm in 0.1 ppm increments	
	Hydrogen Cyanide:	0-30 ppm in 0.1 ppm increments	
	Ammonia:	0-100 ppm in 1 ppm increments	
	Ammonia:	0-1000 ppm in 1 ppm increments	
	Phosphine:	0-1 ppm in 0.01 ppm increments	
	Arsine:	0-50 ppm in 0.1 ppm increments	
	Silane:	0-30 ppm in 0.1 ppm increments	
	Ethylene Oxide:	0-5% of volume in 0.1% increments	
	Carbon Dioxide:	0-150 ppm in 1 ppm increments	
	Isobutylene:	0-10 ppm 0.1 ppm increments	
	Fluorhydric Acid :	0-1 ppm 0.01 ppm increments	
	Ozone:	0-1 ppm 0.01 ppm increments	
	Phosgene:	0-3 ppm 0.01 ppm increments	
	Chlorine Dioxide :	0-3 ppm 0.01 ppm increments	
	Hydrazine :	0-1 ppm 0.01 ppm increments	
WIRELESS NETWORK:	» 2.4 GHz - 100 mW - IEEE 802.15.4 » 30 devices per network » 16 independent networks » Communication distance : 0.6 mile line of sight		
MX 40:	Up to 32 Devices, Wired or Wireless Up to 16 BM 25A NEMA4X Package Configurable up to eight zones Alarm and Fault Condition LEDs Display Indicates: Field Device Location, Alarm Status, Channel, Gas Reading, Battery Life & Signal Strength		
Datalogging Capacity:	200,000 measurements		
Audible Alarm:	103 dB @ 1 meter		
Visual Alarm:	Ultrabright LED beacon visible 360 degrees		
Operating Temperature Range:	-20°C to +50°C (-4°F to 122°F) sensor dependent		
Operating Humidity Range:	1% to 99% RH sensor dependent		
Power Source (Run Time)	NiMH (up to 170 hours operating time, 135 hours in wireless mode)		
Recharge Time:	4.5 hours, typical		
ATEX & IECEx VERSIONS			
BM 25A (standard version)			
Without IR sensor:	II 2G / I M1 Ex db ia IIC T4 Gb / Ex ia I Ma		
With IR sensor:	II 2G / I M2 Ex db ia IIC T4 Gb / Ex db ia I Mb		
BM 25 AW (wireless version)			
Without IR sensor:	II 2G / I M1 Ex db ia IIC T4 Gb / Ex ia I Ma		
With IR sensor:	II 2G / I M2 Ex db ia IIC T4 Gb / Ex db ia I Mb		
INMETRO VERSION			
BM 25A (standard version)			
Without sensor IR:	Ex ia I Ma Ex db ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C		
With sensor IR:	Ex db ia I Mb Ex db ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C		
BM 25AW (wireless version)			
Without sensor IR:	Ex ia I Ma Ex db ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C		
With sensor IR:	Ex db ia I Mb Ex db ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C		

Teledyne Oldham Simtronics' quality assurance programs require continuous assessment and improvement of all our products. Therefore, the information in this leaflet may change without prior notification and should not be considered a product specification. If you require more details, please don't hesitate to contact Teledyne Oldham Simtronics or one of their representatives.



Copyright © 2024 Teledyne Technologies. All rights reserved. GF-30035K-EN

AMERICAS
14880 Skinner Rd
Cypress, TX 77429, USA
Tel.: +1 713-559-9200
Fax: +1 281-746-3064

EMEA
ZI Est, Rue Orfila,
CS 20417
62027 ARRAS CEDEX, France
Tel.: +33-3-21-60-80-80
Fax: +33-3-21-60-80-00

ASIA PACIFIC
Room 04, 9th Floor, 275 Ruijing
Road,
Xuhui District, Shanghai,
China
TGFD_APAC@teledyne.com

www.teledynegasandflamedetection.com

Services d'EURO-INDEX

EURO-INDEX est un fabricant, importateur et distributeur de diverses marques A dans le domaine des instruments de test et de mesure. Nous fournissons également une large gamme de services pour optimiser l'utilisation de ces instruments dans vos activités. Ces services comprennent naturellement l'entretien, la réparation et l'étalonnage des instruments, mais nous proposons aussi une assistance sous forme de formation via notre EURO-INDEX Academy et la location d'instruments.

Centre de Service Agréé

EURO-INDEX est un Centre de Service Agréé pour toutes les marques représentées. Cela signifie que vos instruments sont pris en charge par des techniciens formés par le fabricant et disposant des outils et logiciels adéquats. Seules des pièces d'origine sont utilisées et la garantie de votre instrument, ainsi que les certifications (ATEX, EN50379, etc.) restent intactes.

Laboratoire de maintenance et de calibrage

Le laboratoire des Pays-Bas est accrédité RvA selon la norme EN-ISO/IEC 17025. Cette accréditation est valable pour différentes grandeurs, telles que spécifiées dans le champ d'application associé au numéro d'accréditation K105. Les certificats de calibrage RvA sont acceptés à l'international et équivalents à ceux de BELAC.



Service Mobile

Outre les laboratoires d'étalonnage fixes de Zaventem et de Capelle aan den IJssel, nous disposons également d'un laboratoire itinérant appelé "Service mobile". Nos services peuvent venir vers vous, en offrant une qualité équivalente.

MQS®

MQS® est une formule d'entretien exclusive comportant un entretien et un calibrage périodiques de vos instruments de mesure à un coût fixe et faible. Via un portail Web gratuit (monmq.be), vous avez toujours accès à vos certificats de calibrage.

Location d'instruments de mesure

- Vaste assortiment
- Précision démontrable par le certificat d'étalonnage actuel
- Conseils avisés
- Les instruments sont livrés avec leurs accessoires

EURO-INDEX Academy

- Formations et séminaires
- Vidéos de démonstration et d'instruction
- Notes d'application



Comptoir de service



Entretien, réparation et calibrage



Formations et séminaires



Service Mobile

Sous réserve de modifications EURO-INDEX® FR 23001



BELGIQUE
Chaussée de Louvain 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
sales@euro-index.be
www.euro-index.be

PAYS-BAS
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

