

RUGGED, ACCURATE AND WIRELESS VACUUM GAUGE

Designed for the Field

This tough, new wireless vacuum gauge, MG44 is engineered to give you the reliable readings you need - and the ease of use you want.



Wireless Vacuum Gauge, MG44

- Confidently monitor vacuum with a reliable, leak-proof seal
- Quickly install due to new cylindrical shape and no-slip grip
- Easy-to-read backlit LCD with graphical representation of the vacuum progress even in low light or at odd angles
- Measure vacuum from up to 1000' away
- Connect vacuum gauge at the system for a true representation of the microns at the system




Three ways to use



Stand Alone

The new cylindrical design with reversible coupler fits into tight spaces while still being easy to read. With the large, backlit LCD screen you can see the information from a wide angle and in high and low lights. Rugged, sealed case is weather resistant and stands up to tough conditions.

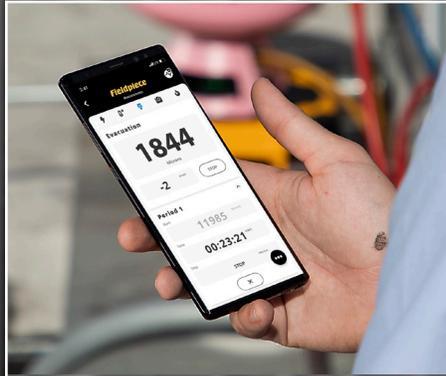

Job Link® System App

This tough vacuum gauge communicates wirelessly with your mobile device to keep you up-to-date on progress from 1000' away so you can move onto another task or out of the way of the customer's business or home.



BLE 4.0 with IOS 7.0 or Android 5.0



SMAN Manifold Screen

Monitor vacuum progress by using a separate vacuum gauge at the system port during any standard evacuation for better accuracy even with the SMAN digital manifold.

Models SM380V/SM480V with latest firmware installed.

Three ways to view

Rate



Vacuum Level
Rate of change

- The running average of the measurement's change per minute.
- A smaller rate of change indicates that the vacuum in the system is beginning to stabilize.

Bar Graph



Microns

- The graphical representation of the measurement.
- The scale is static and nonlinear for increased resolution at deeper vacuums.
- Full bars indicates atmospheric pressure.

Rate Meter



Decreasing



Stable



Increasing

- The graphical representation of the measurement's real-time change per minute.
- The scale is dynamic (i.e. relative to the measurement) making changes easy to see.

MG44

Measurement Range	50 to 25,000 microns (6 to 3333 Pascals)
Maximum Pressure	870 PSI
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Bar Graph Range	Ultimate vacuum to atmospheric pressure
Vacuum Accuracy	5% of reading (+/- 5 microns)
Wireless Range	1000 feet (305 meters) line of sight. Obstructions affect distance.
Battery Life	50 hours, 2 x AA (included)
Water Resistance	IP54



Service van EURO-INDEX

EURO-INDEX verleent service op alle meetinstrumenten uit haar leveringspakket en biedt de faciliteiten, kennis en hoog gekwalificeerd personeel voor (preventief) onderhoud, reparatie en kalibratie van uw meetinstrumenten.

Geautoriseerd Service Centrum

EURO-INDEX is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum.

Dit betekent dat uw instrumenten worden behandeld door goed opgeleid en kundig personeel, dat beschikt over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen gebruikt en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Service- en kalibratielaboratorium

EURO-INDEX beschikt over een bijzonder modern service- en kalibratielaboratorium met RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor verschillende grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



KWS®

KWS is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie. Veel zaken worden voor u geregeld, zodat u zonder zorgen gebruik kunt maken van uw meetinstrumenten. De kosten zijn laag en voorspelbaar.

Digitale toegang tot uw kalibratiecertificaten met Mijn KWS

Via het Mijn KWS webportal heeft u altijd en overal toegang tot uw kalibratiecertificaten en gerelateerde documenten.

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Deskundig advies
- Instrumenten worden geleverd met accessoirepakket en herleidbaar kalibratiecertificaat

EURO-INDEX Academy

- Producttrainingen (individueel en klassikaal)
- Seminars
- Demonstratie- en instructievideo's

Bekijk de video op ons YouTube kanaal en ontdek alles over KWS



Servicebalie



Kalibratie rookgasanalyse



Seminars en workshops



Kalibratie thermografie

Wijzigingen voorbehouden EURO-INDEX® VL 18001

Het Bluetooth® woord- en beeldmerk zijn eigendom van Bluetooth SIG, Inc. Gebruik van deze merken door EURO-INDEX geschiedt onder licentie.



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
info@euro-index.be
www.euro-index.be

NEDERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

